


Uponor Minitec compression adapter male 9,9-R1/2"MT

1016691

- Made of brass
- Screw

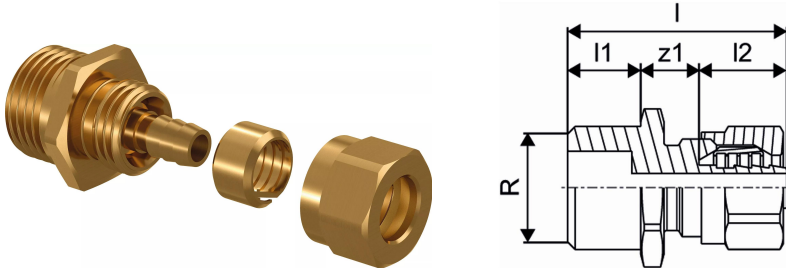

About Uponor Minitec compression adapter male

Specification

- Minitec underfloor heating system for fixation on solid floors or specified insulation materials
- designed as sturdy pipe fixing system of minimum height, with integrated pipe laying channels for correct pipe laying distances
- for use with Uponor Minitec PE-Xa pipes 9.9 x 1.1 mm; allowing for straight and diagonal pipe laying
- EN 13501-1 fire classification: class E.
- standard flammability, building-material class B2, conforming to DIN 4102.
- Pipe spacing: Vz 5, 10, 15
- Net surface with overlapping nubs: 0,77m²

Application


- radiant underfloor heating and cooling
- very low construction height
- for use with qualified filler materials

Certification

- DIN CERTCO: 7F170-F

Uponor Minitec compression adapter male 9,9-R1/2"MT

1016691

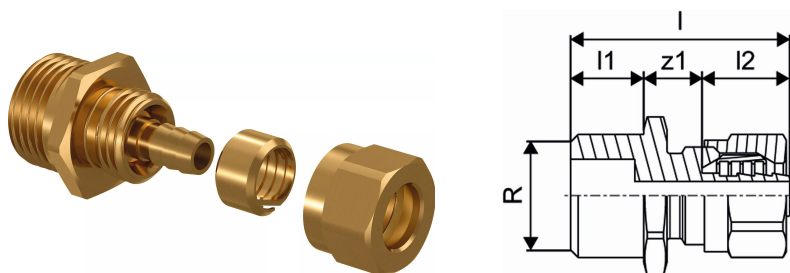

Technical data

Item no EAN	6414905515844
Item no GTIN	06414905515844
Item no VVS	045467039
Item no LVI	2022151
Item (unit of measurement)	pce
Length (l)	38 mm
Length (l1)	13 mm
Length (l2)	15 mm
Packaging Quantity 1	12
Packaging Quantity 3	120
Packaging Quantity 4	17280
Packaging GTIN PL1	06414905437054
Packaging GTIN PL3	06414905446568
Packaging GTIN PL4	06414905490561
Item Unit Length	25
Item Unit Height	38
Item Unit Weight	0,068
Item Unit Width	25

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb