


## Uponor Ecoflex Thermo Single 50x4,6/175

1018112

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- PEX foam, HDPE casing

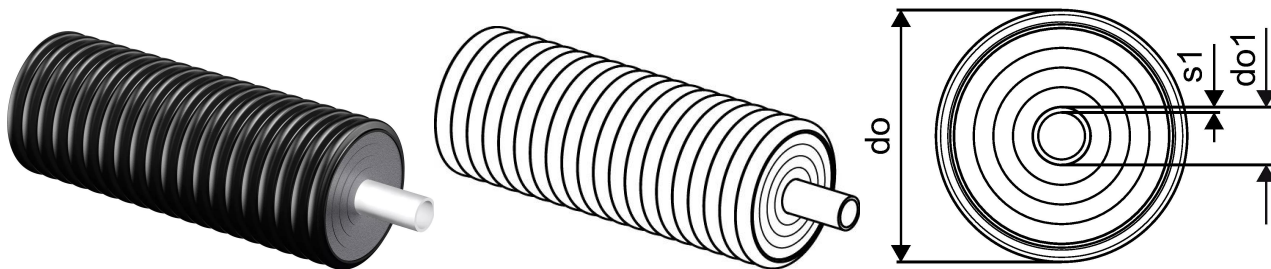

### About Uponor Ecoflex Thermo Single

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) or PN 10 (SDR 7,4), Oxygen tightness based on EN 15632
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application

- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex Thermo Single 50x4,6/175

1018112



### Technical data

|                            |                |
|----------------------------|----------------|
| Item no EAN                | 6414905200559  |
| Item no GTIN               | 06414905200559 |
| Item no VVS                | 087807050      |
| RSK no.                    | 2190559        |
| Item no NRF                | 8360512        |
| Item no LVI                | 3010215        |
| Item (unit of measurement) | m              |
| Bending radius 2           | 0,45 m         |
| Packaging Quantity 1       | 200            |
| Packaging GTIN PL1         | 06414905437146 |
| Item Unit Length           | 1000           |
| Item Unit Height           | 175            |
| Item Unit Weight           | 2,26           |
| Item Unit Width            | 175            |

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)