


## Uponor Ecoflex Thermo Single 75x6,8/200

1018114

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- PEX foam, HDPE casing

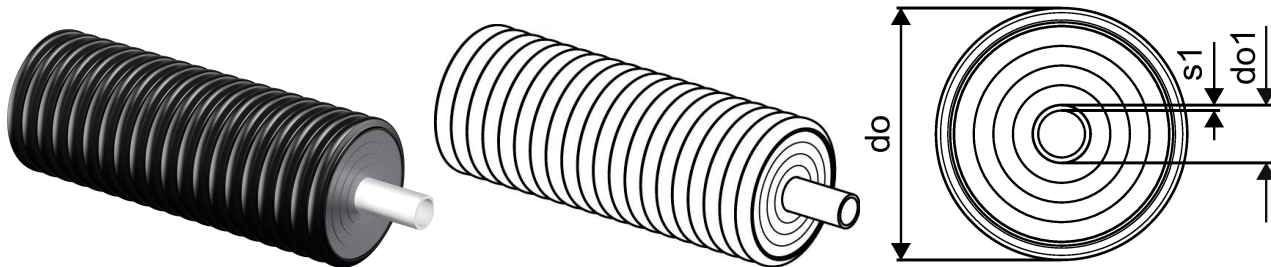

### About Uponor Ecoflex Thermo Single

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) or PN 10 (SDR 7,4), Oxygen tightness based on EN 15632
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex Thermo Single 75x6,8/200

1018114

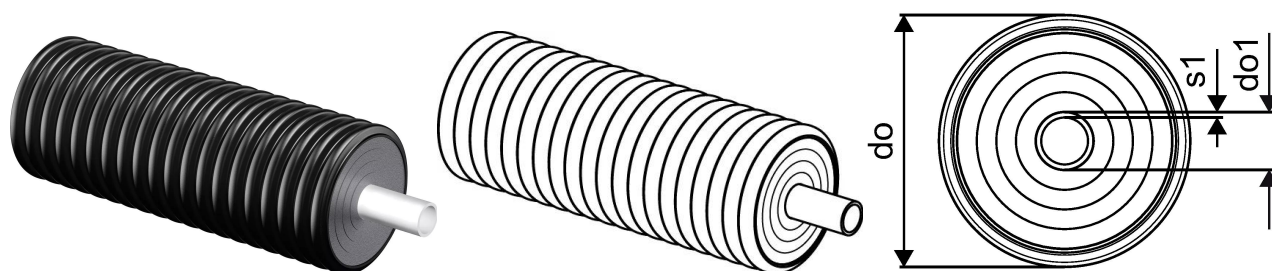

### Technical data

Item no EAN	6414905200719
Item no GTIN	06414905200719
Item no VVS	087807075
RSK no.	2190417
Item no NRF	8360514
Item no LVI	3010207
Item (unit of measurement)	m
Bending radius 2	0,8 m
Packaging Quantity 1	100
Packaging GTIN PL1	06414905437160
Item Unit Length	1000
Item Unit Height	200
Item Unit Weight	3,74
Item Unit Width	200

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)