


Uponor Ecoflex Thermo Single 90x8,2/200

1018115

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- PEX foam, HDPE casing

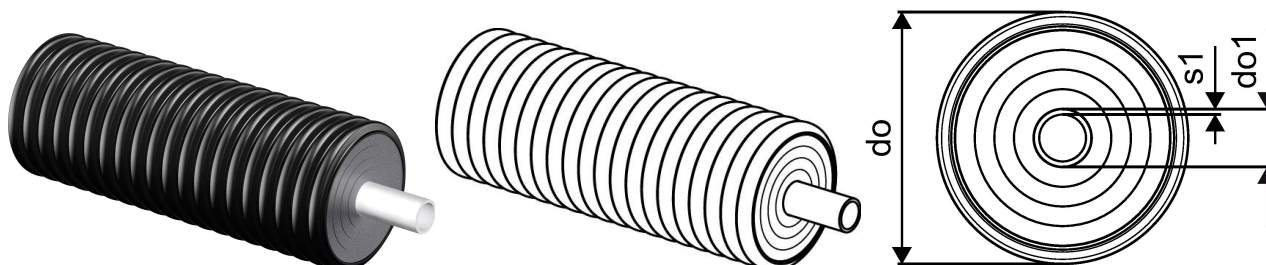

About Uponor Ecoflex Thermo Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) or PN 10 (SDR 7,4), Oxygen tightness based on EN 15632
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application

- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Thermo Single 90x8,2/200

1018115



Technical data

Item no EAN	6414905200818
Item no GTIN	06414905200818
Item no VVS	087807090
RSK no.	2190418
Item no NRF	8360515
Item no LVI	3010209
Item (unit of measurement)	m
Bending radius 2	1,1 m
Packaging Quantity 1	100
Packaging GTIN PL1	06414905437177
Item Unit Length	1000
Item Unit Height	200
Item Unit Weight	4,2
Item Unit Width	200

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb