


Uponor Ecoflex Aqua Single 32x4,4/140

1018118

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing

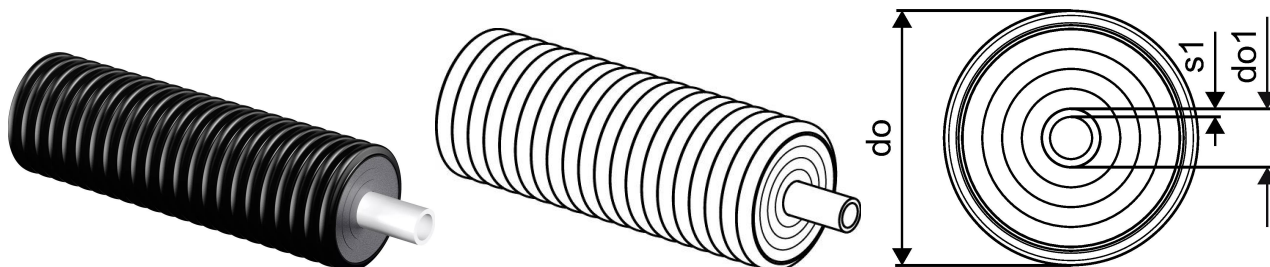

About Uponor Ecoflex Aqua Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application

- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

Uponor Ecoflex Aqua Single 32x4,4/140

1018118



Technical data

Item no EAN	6414905202157
Item no GTIN	06414905202157
Item no VVS	087361632
RSK no.	2190565
Item no NRF	8360532
Item no LVI	3010113
Item (unit of measurement)	m
Bending radius 2	0,4 m
Packaging Quantity 1	200
Packaging GTIN PL1	06414905437207
Item Unit Length	1000
Item Unit Height	140
Item Unit Weight	1,42
Item Unit Width	140

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb