


Uponor Ecoflex Thermo Twin 2x40x3,7 /175

1018136

- Heating and Cooling
- Two medium pipes PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- PEX foam, HDPE casing

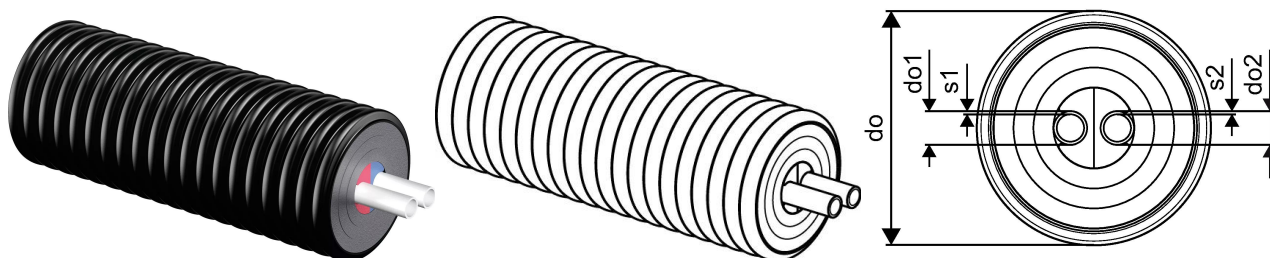

About Uponor Ecoflex Thermo Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) or PN 10 (SDR 7,4), Oxygen tightness based on EN 15632
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Thermo Twin 2x40x3,7 /175

1018136

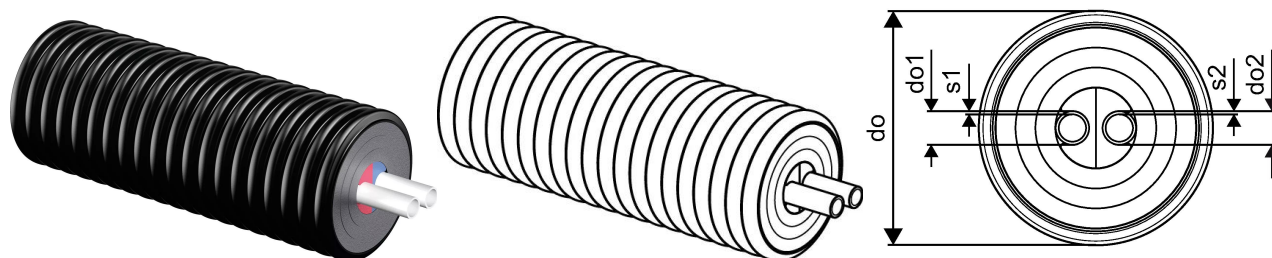

Technical data

Item no EAN	6414905210459
Item no GTIN	06414905210459
Item no VVS	087809040
RSK no.	2190563
Item no NRF	8360504
Item no LVI	3010234
Item (unit of measurement)	m
Bending radius 2	0,8 m
Packaging Quantity 1	200
Packaging GTIN PL1	06414905437382
Item Unit Length	1000
Item Unit Height	175
Item Unit Weight	2,33
Item Unit Width	175

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb