


## Uponor Ecoflex Aqua Twin 40x5,5-25x3,5/175

1018141

- Warm tap water with circulation
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

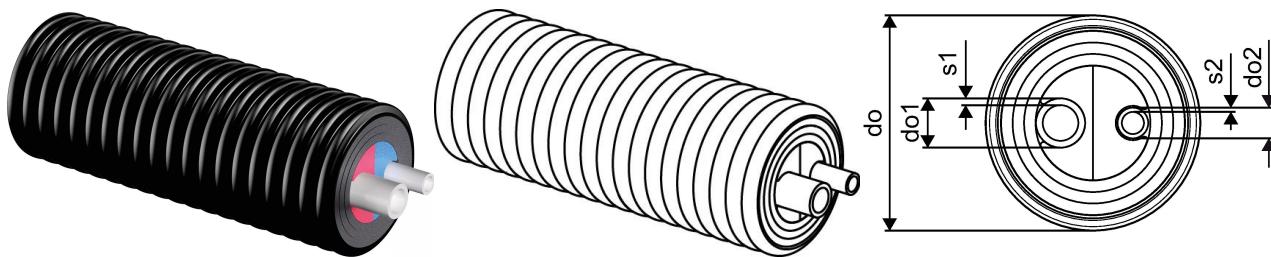

### About Uponor Ecoflex Aqua Twin

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approval should be checked by local responsible person

## Uponor Ecoflex Aqua Twin 40x5,5-25x3,5/175

1018141

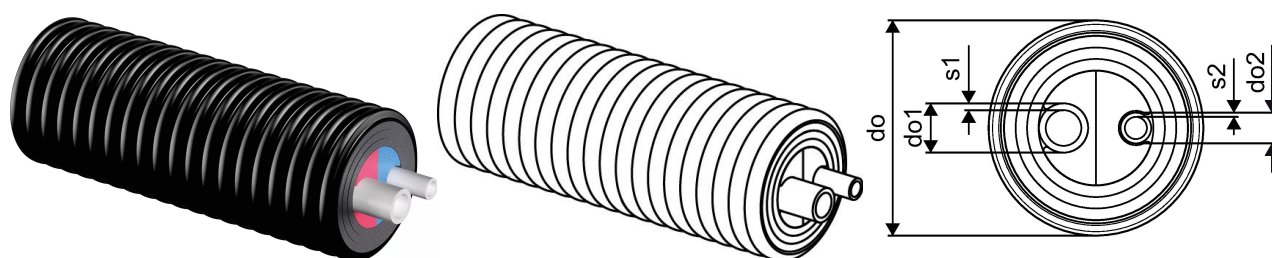

### Technical data

Item no EAN	4021598111745
Item no GTIN	04021598111745
Item no VVS	087363440
RSK no.	2266162
Item no NRF	8360874
Item no LVI	3010181
Item (unit of measurement)	m
Bending radius 2	0,9 m
Packaging Quantity 1	200
Packaging GTIN PL1	06414905437436
Item Unit Length	1000
Item Unit Height	175
Item Unit Weight	2,45
Item Unit Width	175

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)