


Uponor Ecoflex Quattro 2x32x2,9-32x4,4-25x3,5/175

1018149

- Heating and warm tap water with circulation
- Four medium pipe PE-Xa, SDR 11 and 7,4
- Max. load 6 bar heating / 10 bar tap water / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion between the lines

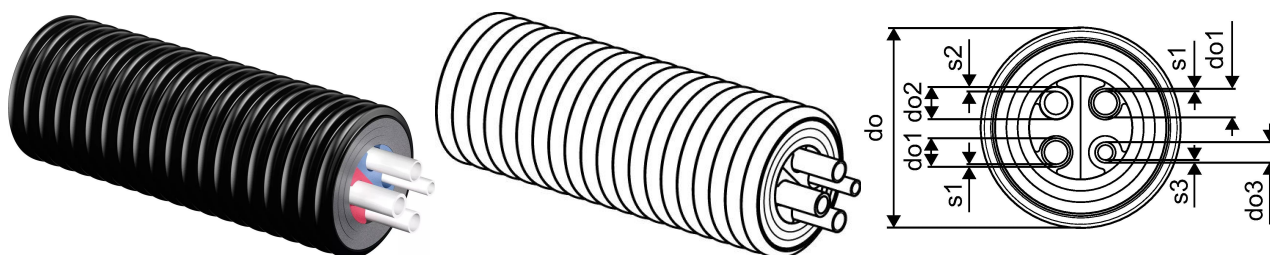

About Uponor Ecoflex Quattro

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) and PN10 (SDR 7,4), Oxygen tightness based on EN 15632 for heating pipes
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application

- Transport of heating and warm tap water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Tap water operating temperature 70°C based on EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Quattro 2x32x2,9-32x4,4-25x3,5/175

1018149



Technical data

Item no EAN	4021598111790
Item no GTIN	04021598111790
Item no VVS	087817860
Item (unit of measurement)	m
Bending radius 2	0,8 m
Wall thickness s3	3,5 mm
Packaging Quantity 1	200
Packaging GTIN PL1	06414905437474
Item Unit Length	1000
Item Unit Height	175
Item Unit Weight	2,78
Item Unit Width	175

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb