


## Uponor Ecoflex chamber 6x140/175/200

**1018326**

- Chamber for connecting the casing pipe
- PE body with insulation and reducer spigots
- T and X models available
- Traffic load of 500 kg, higher load with special concret construction possible

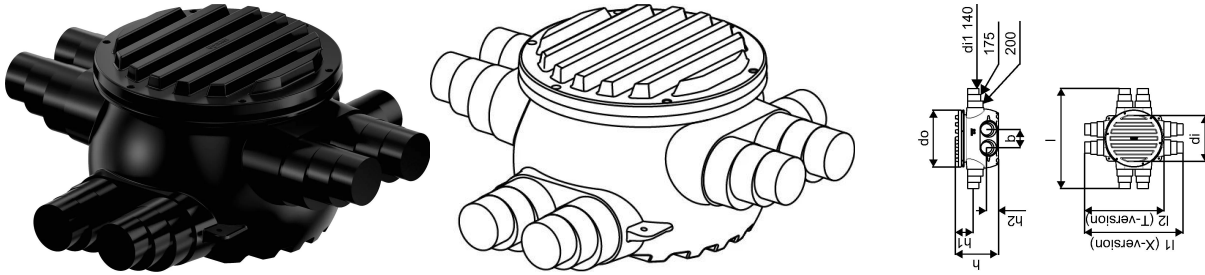

### About Uponor Ecoflex chamber

#### Specification

- All accessories are corrosion resistant.

#### Application



- Ecoflex accessories are designed to complete the assortment in buried installation.

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex chamber 6x140/175/200

1018326

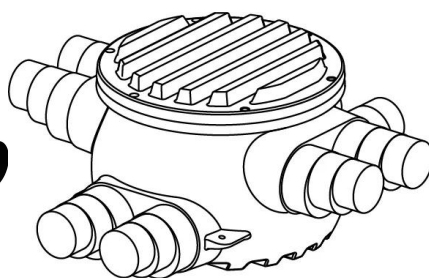

### Technical data

Item no EAN	6414905230020
Item no GTIN	06414905230020
Item no VVS	087918006
RSK no.	2190554
Item no NRF	8360631
Item no LVI	3010807
Item (unit of measurement)	pce
Length (l)	1652 mm
Length (l2)	1316 mm
Z-measurement b	300 mm
Z-measurement h	725 mm
Z-measurement h1	420 mm
Z-measurement h2	200 mm
Packaging Quantity 1	1
Packaging Quantity 4	3
Packaging GTIN PL1	06414900324847
Packaging GTIN PL4	06414905490677
Item Unit Length	1652
Item Unit Height	725
Item Unit Weight	51
Item Unit Width	1316

### Technical documents

[Download documents here](#)

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)