


Uponor Ecoflex chamber 8x140/175/200

1018327

- Chamber for connecting the casing pipe
- PE body with insulation and reducer spigots
- T and X models available
- Traffic load of 500 kg, higher load with special concret construction possible

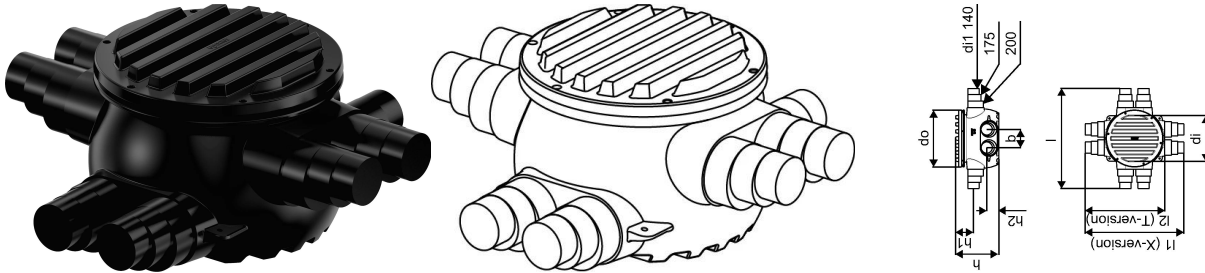

About Uponor Ecoflex chamber

Specification

- All accessories are corrosion resistant.

Application


- Ecoflex accessories are designed to complete the assortment in buried installation.

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex chamber 8x140/175/200

1018327

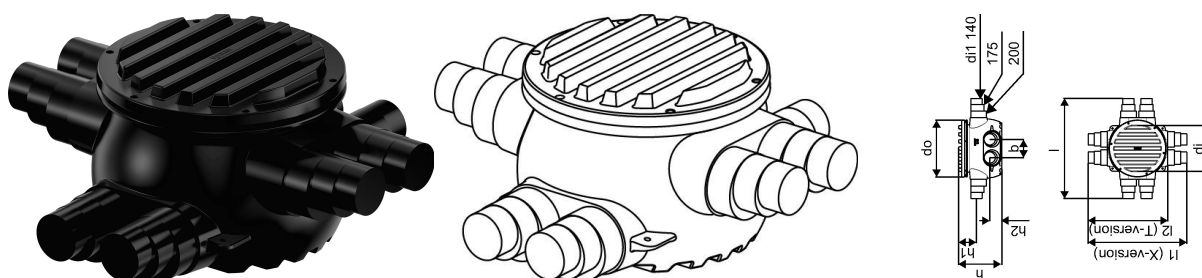

Technical data

Item no EAN	6414905230037
Item no GTIN	06414905230037
Item no VVS	087918008
RSK no.	2190553
Item no NRF	8360632
Item no LVI	3010808
Item (unit of measurement)	pce
Length (l)	1652 mm
Length (l1)	1632 mm
Z-measurement b	300 mm
Z-measurement h	725 mm
Z-measurement h1	420 mm
Z-measurement h2	200 mm
Packaging Quantity 1	1
Packaging Quantity 4	3
Packaging GTIN PL1	06414900324861
Packaging GTIN PL4	06414905490684
Item Unit Length	1652
Item Unit Height	725
Item Unit Weight	54
Item Unit Width	1632

Technical documents

[Download documents here](#)

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb