


Uponor Wipex coupling PN6 50x4,6-G1 1/4

1018331

- Connection of PE-Xa or PE pipe
- 6 bar, SDR 11
- Cylindric thread G" for O-ring sealing
- DR = dezincification resistance brass

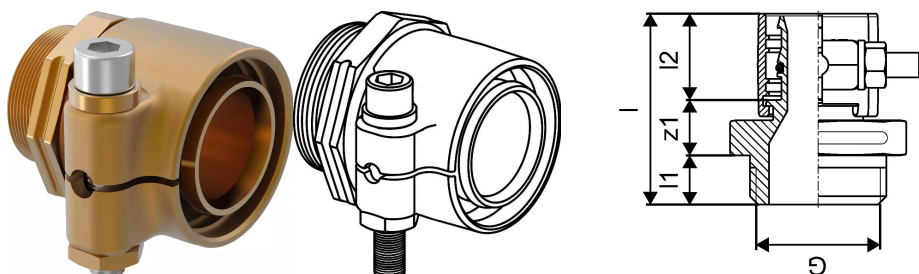

About Uponor Wipex coupling PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex coupling PN6 50x4,6-G1 1/4

1018331

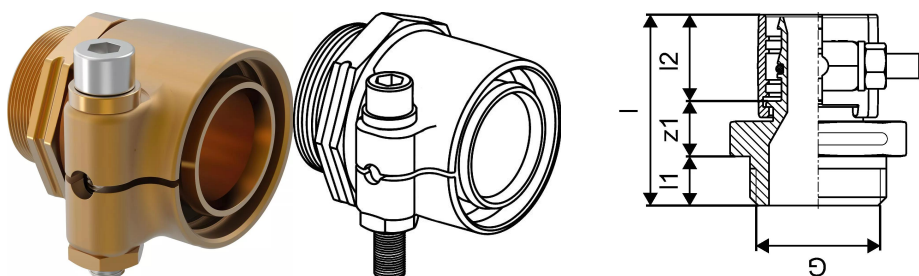

Technical data

Item no EAN	7331541100045
Item no GTIN	07331541100045
Item no VVS	087883050
RSK no.	2410667
Item no NRF	8362392
Item no LVI	1932050
Item (unit of measurement)	pce
Length (l)	68 mm
Length (l1)	16 mm
Length (l2)	37 mm
Packaging Quantity 1	1
Packaging Quantity 3	10
Packaging Quantity 4	960
Packaging GTIN PL1	06414905259694
Packaging GTIN PL3	06414905259700
Packaging GTIN PL4	06414905259717
Item Unit Length	67
Item Unit Height	69
Item Unit Weight	0,647
Item Unit Width	60

Technical documents

[Download documents here](#)

UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb