


## Uponor Wipex coupling PN6 110x10,0-G3

**1018335**

- Connection of PE-Xa or PE pipe
- 6 bar, SDR 11
- Cylindric thread G" for O-ring sealing
- DR = dezincification resistance brass

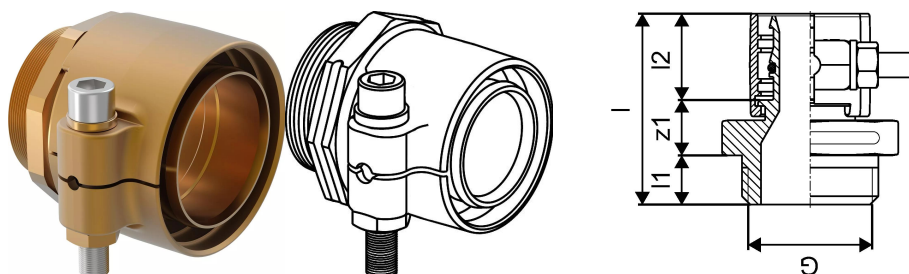

### About Uponor Wipex coupling PN6

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

## Uponor Wipex coupling PN6 110x10,0-G3

1018335

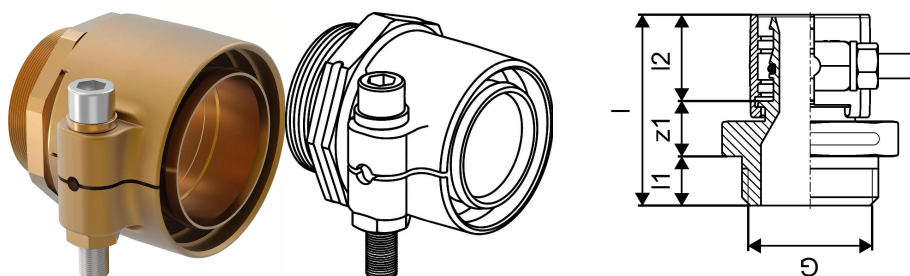

### Technical data

Item no EAN	7331541100090
Item no GTIN	07331541100090
Item no VVS	087883091
RSK no.	2410671
Item no NRF	8362396
Item no LVI	1932100
Item (unit of measurement)	pce
Length (l)	118 mm
Length (l1)	24 mm
Length (l2)	72 mm
Packaging Quantity 1	1
Packaging Quantity 3	3
Packaging Quantity 4	144
Packaging GTIN PL1	06414905259823
Packaging GTIN PL3	06414905259830
Packaging GTIN PL4	06414905259847
Item Unit Length	140
Item Unit Height	117
Item Unit Weight	2,998
Item Unit Width	125

### Technical documents

[Download documents here](#)

UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)