


Uponor Wipex coupling PN10 63x8,6-G2

1018341

- Connection of PE-Xa or PE pipe
- 10 bar, SDR 7,4
- Cylindric thread G" for O-ring sealing
- DR = dezincification resistance brass

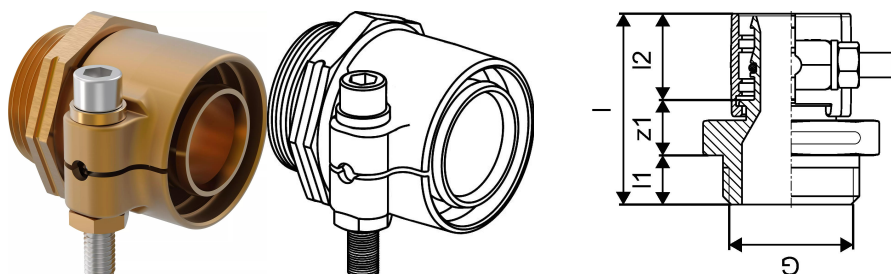

About Uponor Wipex coupling PN10

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex coupling PN10 63x8,6-G2

1018341

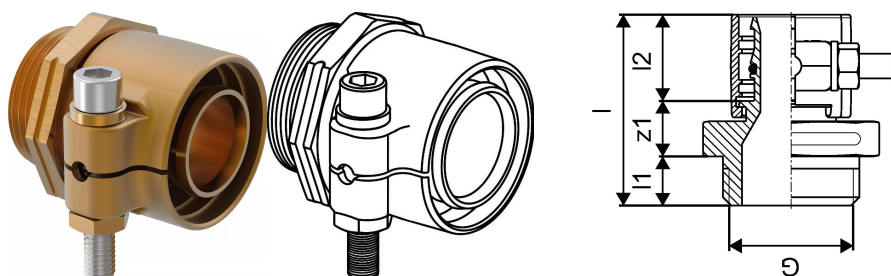

Technical data

Item no EAN	7331541114165
Item no GTIN	07331541114165
Item no VVS	087883163
RSK no.	2410676
Item no NRF	5110377
Item no LVI	1932163
Item (unit of measurement)	pce
Length (l)	84 mm
Length (l1)	20 mm
Length (l2)	46 mm
Packaging Quantity 1	1
Packaging Quantity 3	8
Packaging GTIN PL1	06414905259977
Packaging GTIN PL3	06414905260003
Item Unit Length	84
Item Unit Height	82
Item Unit Weight	1,123
Item Unit Width	98

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb