


Uponor Wipex coupling PN10 110x15,1-G3

1023170

- Connection of PE-Xa or PE pipe
- 10 bar, SDR 7,4
- Cylindric thread G" for O-ring sealing
- DR = dezincification resistance brass

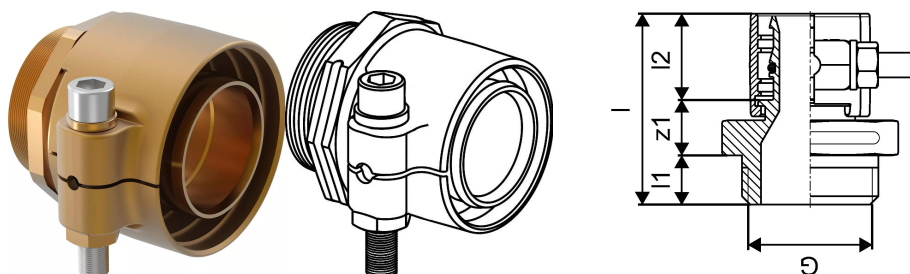

About Uponor Wipex coupling PN10

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex coupling PN10 110x15,1-G3

1023170

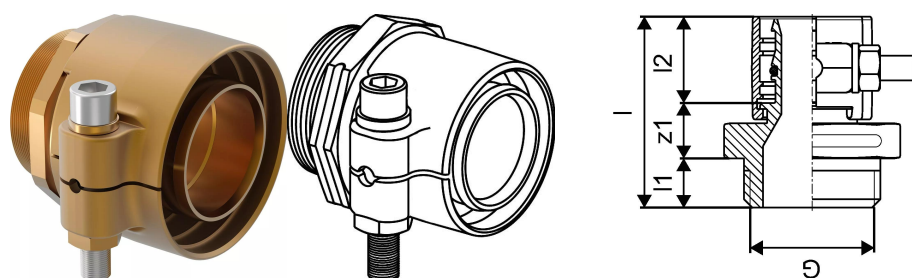

Technical data

Item no EAN	7331541100175
Item no GTIN	07331541100175
Item no VVS	087883191
RSK no.	2410679
Item no NRF	8360678
Item no LVI	1932194
Item (unit of measurement)	pce
Length (l)	118 mm
Length (l1)	24 mm
Length (l2)	72 mm
Packaging Quantity 1	1
Packaging Quantity 3	3
Packaging GTIN PL1	06414905261932
Packaging GTIN PL3	06414905261949
Item Unit Length	118
Item Unit Height	127
Item Unit Weight	3,177
Item Unit Width	150

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb