


## Uponor S-Press reducer PPSU 63-40

**1032883**

- Fast installation with easy bevel and without calibration
- Colour code

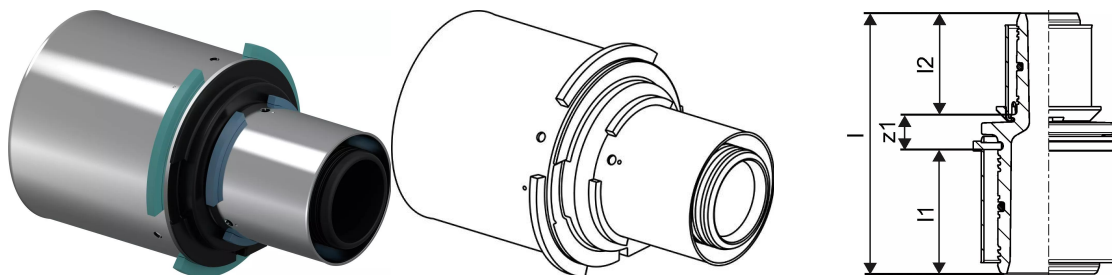

### About Uponor S-Press reducer PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification

-WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


-WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

## Uponor S-Press reducer PPSU 63-40

1032883

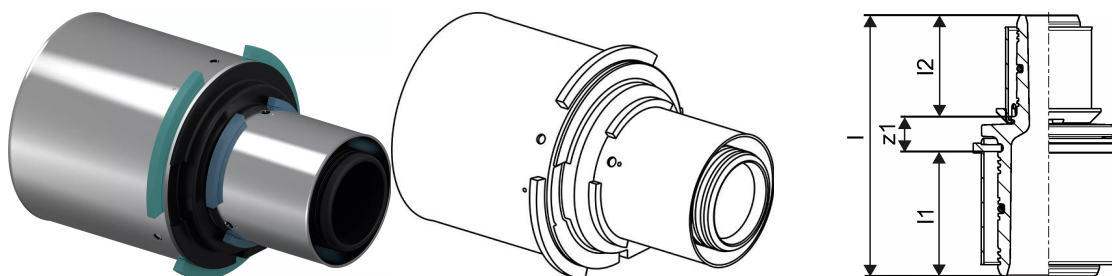

### Technical data

Item no EAN	6414905220823
Item no GTIN	06414905220823
Item no VVS	087454163
RSK no.	1899462
Item no NRF	5114365
Item no LVI	1720120
Item (unit of measurement)	pce
Length (I)	115 mm
Length (I1)	61 mm
Length (I2)	37 mm
Packaging Quantity 1	1
Packaging Quantity 4	384
Packaging GTIN PL1	06414905281152
Packaging GTIN PL4	06414905281169
Item Unit Length	115
Item Unit Height	72
Item Unit Weight	0,235
Item Unit Width	72

### Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)