


Uponor Aqua Pipe natural Aenor PN6, S 50x4,6 5m

1033485

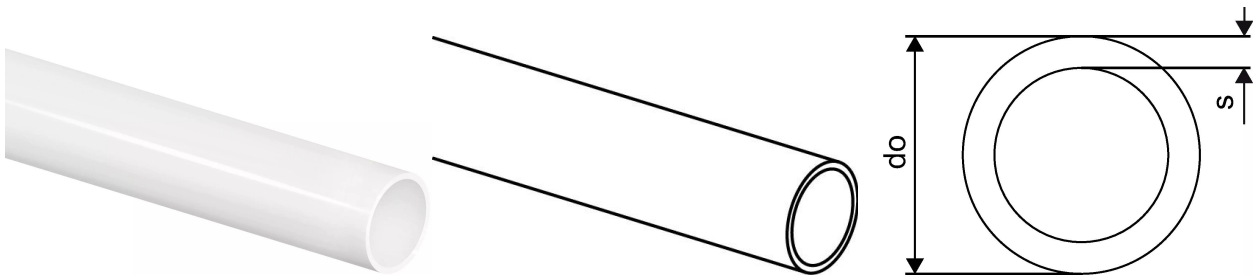

About Uponor Aqua Pipe natural Aenor PN6, S

Application

- Hot water services - where the water temperature does not continuously exceed 70°C, maximum design pressure of 6 bar (conditions to class 2 - BS EN ISO 15875-1:2003). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.
- Cold water services <20 °C - where the maximum system pressure does not exceed the maximum operating pressure of 10 bar.
- Uponor Q&E Shrink-fit system can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Hot water services'

Uponor Aqua Pipe natural Aenor PN6, S 50x4,6 5m

1033485



Technical data

Item no EAN	7321500046156
Item no GTIN	07321500046156
Item (unit of measurement)	m
Packaging Quantity 4	10
Packaging Quantity 4	550
Packaging GTIN PL2	06414905265756
Packaging GTIN PL4	06414905265763
Item Unit Length	1000
Item Unit Height	50
Item Unit Weight	0,654
Item Unit Width	50

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb