



## Uponor Siccus 20 panel EPS 790x1200x30mm

1034347

- UFH installation panels with grooves
- EPS Compressive strength: = 200 kPa

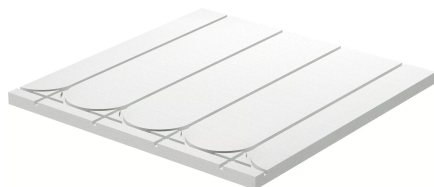

### About Uponor Siccus 20 panel

#### Specification



- Siccus underfloor heating panel system, consists of EPS (HBCD-free) boards acc. EN 13163 with Aluminium heat spreaders.
- EN 13501-1 fire classification: class E
- for installations with pipe c-c 300mm
- for pipe dim 20mm

#### Application

- radiant underfloor heating and cooling
- for dry-build installations

## Uponor Siccus 20 panel EPS 790x1200x30mm

1034347

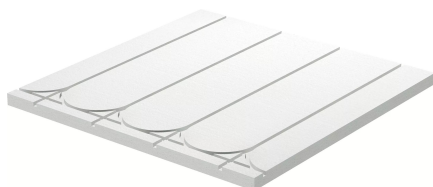

### Technical data

Item no EAN	7321500030971
Item no GTIN	07321500030971
Item no VVS	339261028
RSK no.	2419500
Item no NRF	8362052
Item no LVI	2023430
Item (unit of measurement)	pce
Distance_center_center	300 mm
Length (l)	1200 mm
Z-measurement b	790 mm
Z-measurement h	30 mm
Packaging Quantity 1	5
Packaging Quantity 4	25
Packaging GTIN PL1	06414905457601
Packaging GTIN PL4	06414905491827
Item Unit Length	790
Item Unit Height	30
Item Unit Weight	0,83
Item Unit Width	1200

### Technical documents

Download documents here

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)