


Uponor Wipex jointing equal PN10 32x4,4-32x4,4

1042974

- Connection of PE-Xa or PE pipe
- 10 bar, SDR 7,4
- DR = dezincification resistance brass

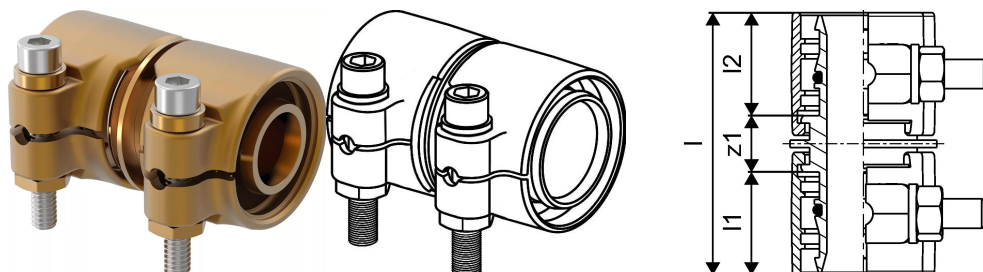

About Uponor Wipex jointing equal PN10

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex jointing equal PN10 32x4,4-32x4,4

1042974

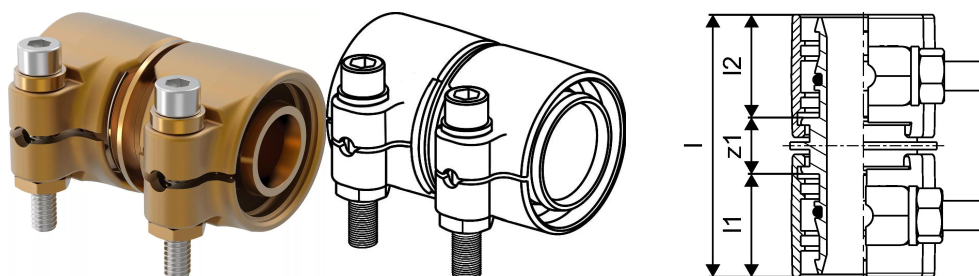

Technical data

Item no EAN	7331541200769
Item no GTIN	07331541200769
Item no VVS	087882132
RSK no.	2410689
Item no NRF	8360782
Item no LVI	1932109
Item (unit of measurement)	pce
Length (l)	64 mm
Length (l1)	26 mm
Length (l2)	26 mm
Packaging Quantity 1	1
Packaging Quantity 3	25
Packaging Quantity 4	1800
Packaging GTIN PL1	06414905299966
Packaging GTIN PL3	06414905299973
Packaging GTIN PL4	06414905299980
Item Unit Length	36
Item Unit Height	60
Item Unit Weight	0,333
Item Unit Width	48

Technical documents

[Download documents here](#)

UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb