


Uponor Wipex RS adapter PN6 DR 63x5,8 RS2

1047013

- RS = unique modular fitting connection
- 6 bar, SDR 11
- DR = dezincification resistance brass

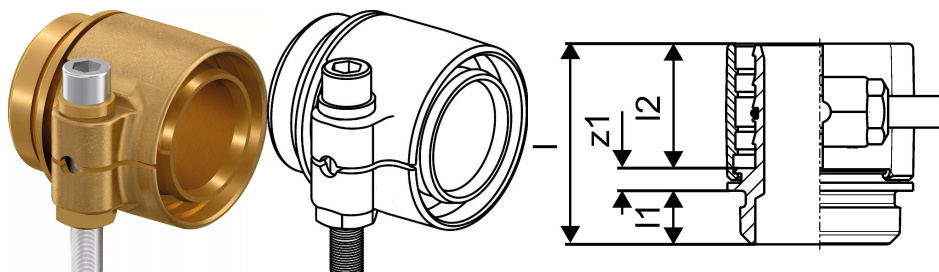

About Uponor Wipex RS adapter PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex RS adapter PN6 DR 63x5,8 RS2

1047013

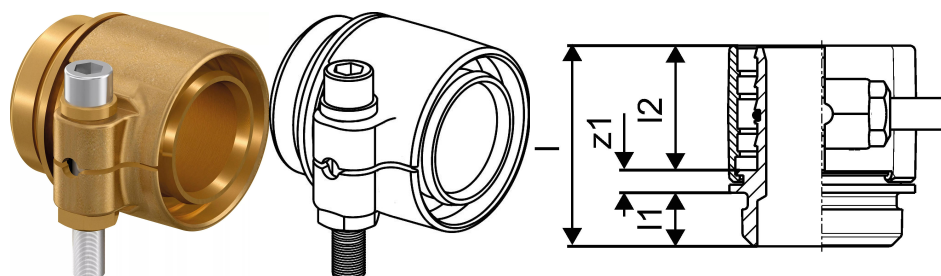

Technical data

Item no EAN	4021598114791
Item no GTIN	04021598114791
Item (unit of measurement)	pce
Length (l)	75 mm
Length (l1)	46 mm
Length (l2)	20 mm
Packaging Quantity 1	1
Packaging Quantity 4	240
Packaging GTIN PL1	06414905402137
Packaging GTIN PL4	06414905402144
Item Unit Length	75
Item Unit Height	85
Item Unit Weight	0,929
Item Unit Width	19

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb