


Uponor Wipex RS adapter PN6 DR 110x10,0 RS3

1047016

- RS = unique modular fitting connection
- 6 bar, SDR 11
- DR = dezincification resistance brass

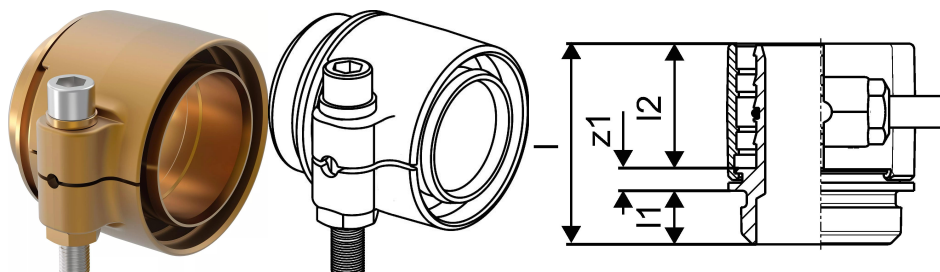

About Uponor Wipex RS adapter PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex RS adapter PN6 DR 110x10,0 RS3

1047016

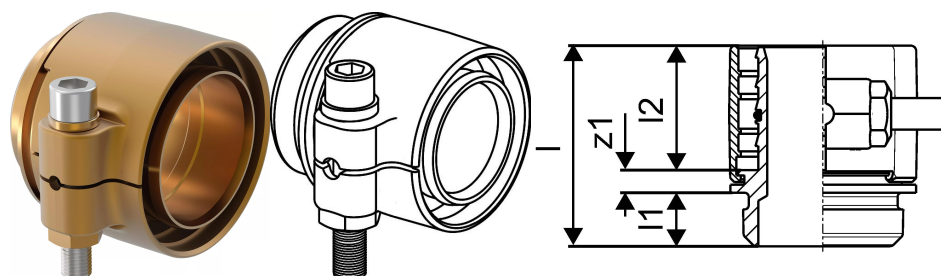

Technical data

Item no EAN	4021598114821
Item no GTIN	04021598114821
Item (unit of measurement)	pce
Length (l)	105 mm
Length (l1)	71 mm
Length (l2)	20 mm
Packaging Quantity 1	1
Packaging Quantity 4	180
Packaging GTIN PL1	06414905402199
Packaging GTIN PL4	06414905402205
Item Unit Length	144
Item Unit Height	107
Item Unit Weight	2,605
Item Unit Width	124

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb