


Uponor Combi Pipe white opaque PN6 S 16x1,8 3m

1058803

- Operating pressure 6 bar
- bars
- white with opaque layer

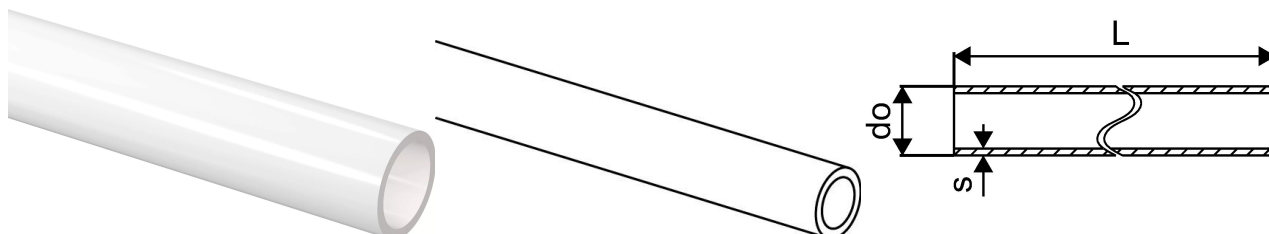

About Uponor Combi Pipe white opaque PN6 S

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 2 - hot water supply
- Application class 4 - Underfloor heating and low temperature radiators
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 90°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Combi Pipe white opaque PN6 S 16x1,8 3m

1058803

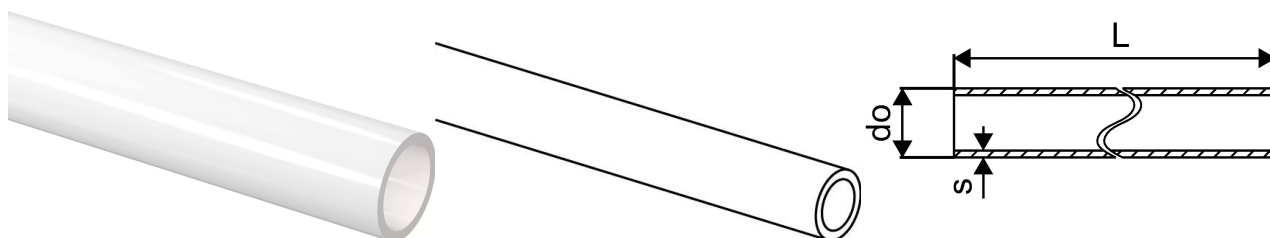

Technical data

Item no EAN	6414905514304
Item no GTIN	06414905514304
Item (unit of measurement)	m
Packaging Quantity 4	75
Packaging Quantity 4	2625
Packaging GTIN PL2	06414905422302
Packaging GTIN PL4	06414905422319
Item Unit Length	1000
Item Unit Height	16
Item Unit Weight	0,14
Item Unit Width	16

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb