


Uponor Combi Pipe opaque in conduit red 20x1,9 28/23 50m

1059180

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 2 - hot water supply
- Application class 4 - Underfloor heating and low temperature radiators
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1
- Conduits manufactured from high density polyethylene
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 90°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Leakage free installations with possibility to exchange pipes in case of damage

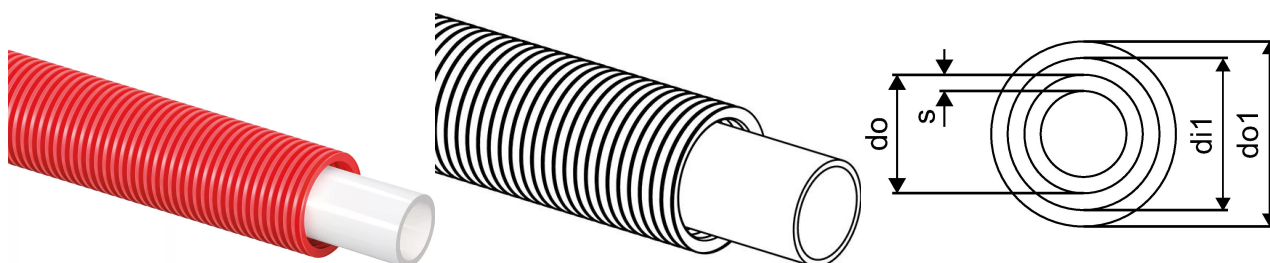

About Uponor Combi Pipe opaque in conduit red

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 2 - hot water supply
- Application class 4 - Underfloor heating and low temperature radiators
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 90°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Combi Pipe opaque in conduit red 20x1,9 28/23 50m

1059180

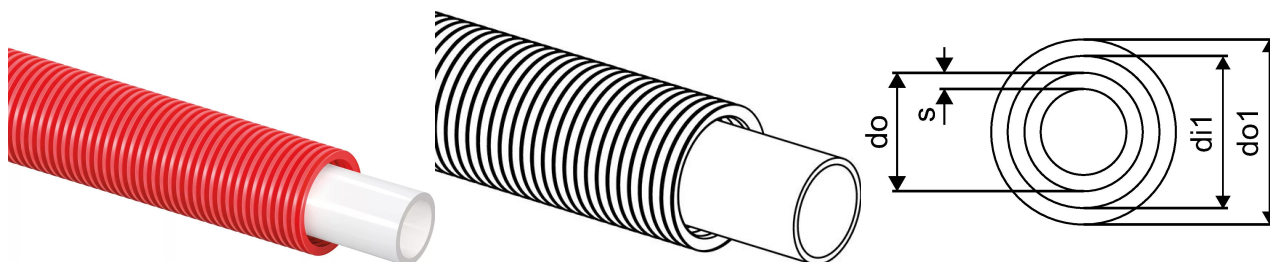

Technical data

Item no EAN	6414905514380
Item no GTIN	06414905514380
Item (unit of measurement)	m
Packaging Quantity 1	50
Packaging Quantity 4	350
Packaging GTIN PL1	06414905463459
Packaging GTIN PL4	06414905495634
Item Unit Length	1000
Item Unit Height	28
Item Unit Weight	0,23
Item Unit Width	28

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb