


## Uponor Combi Pipe opaque in conduit red 25x2,3 34/28 50m


### 1059181

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 2 - hot water supply
- Application class 4 - Underfloor heating and low temperature radiators
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1
- Conduits manufactured from high density polyethylene
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 90°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Leakage free installations with possibility to exchange pipes in case of damage

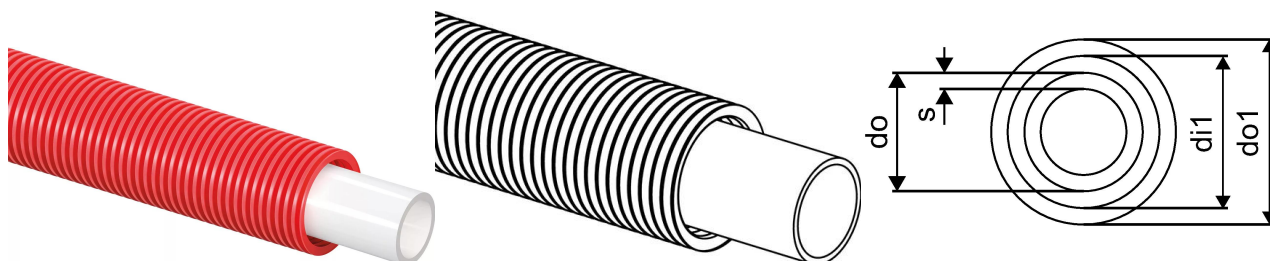

## Uponor Combi Pipe opaque in conduit red 25x2,3 34/28 50m

1059181

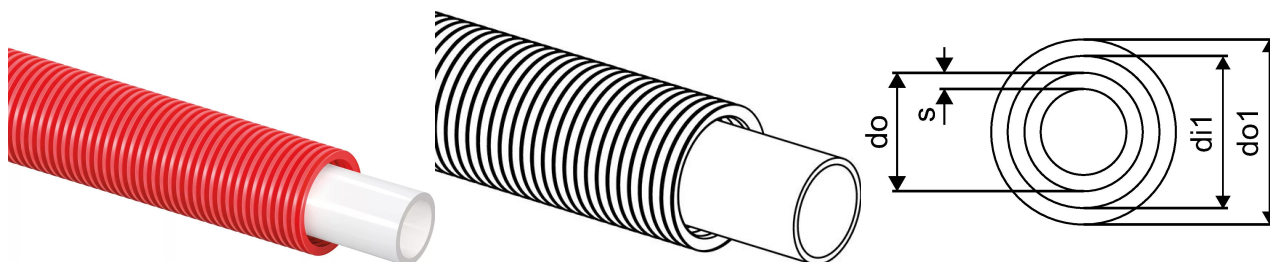

### Technical data

Item no EAN	6414905514397
Item no GTIN	06414905514397
Item (unit of measurement)	m
Packaging Quantity 1	50
Packaging Quantity 4	300
Packaging GTIN PL1	06414905410408
Packaging GTIN PL4	06414905410415
Item Unit Length	1000
Item Unit Height	34
Item Unit Weight	0,34
Item Unit Width	34

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)