


## Uponor Combi Pipe white opaque PN6 16x1,8 100m

1059182

- Operating pressure 6 bar
- Coils
- White with opaque layer

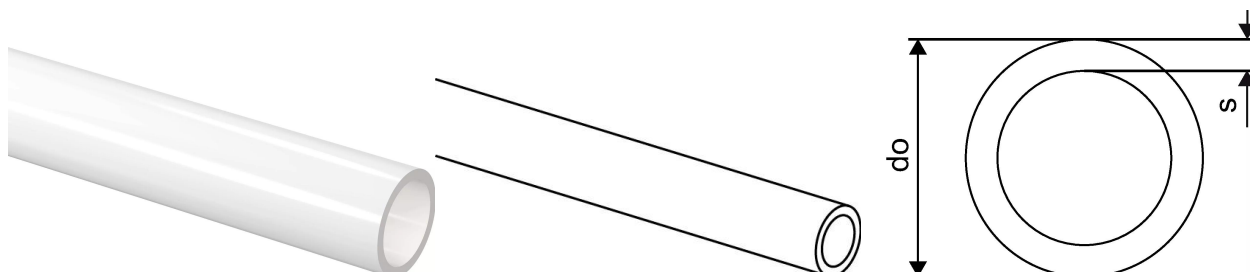

### About Uponor Combi Pipe white opaque PN6

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 2 - hot water supply
- Application class 4 - Underfloor heating and low temperature radiators
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 90°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Combi Pipe white opaque PN6 16x1,8 100m

1059182

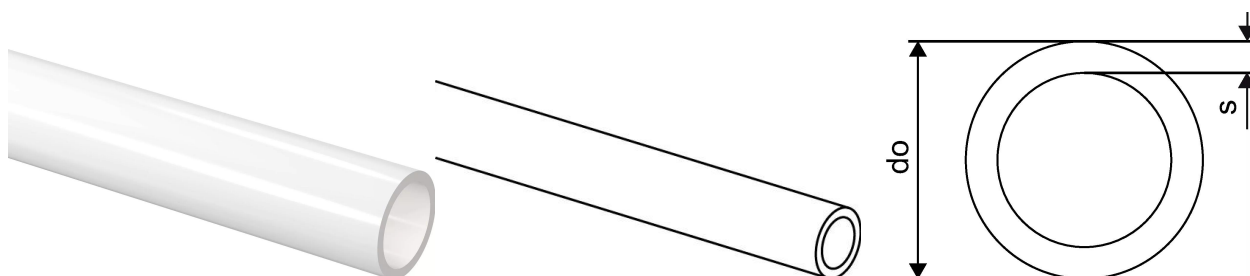

### Technical data

Item no EAN	6414905514403
Item no GTIN	06414905514403
Item (unit of measurement)	m
Packaging Quantity 1	100
Packaging Quantity 4	1100
Packaging GTIN PL1	06414905410422
Packaging GTIN PL4	06414905410439
Item Unit Length	1000
Item Unit Height	16
Item Unit Weight	0,14
Item Unit Width	16

### Technical documents

[Download documents here](#)

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)