


Uponor Combi Pipe white opaque PN6 16x1,8 200m

1059183

- Operating pressure 6 bar
- Coils
- White with opaque layer

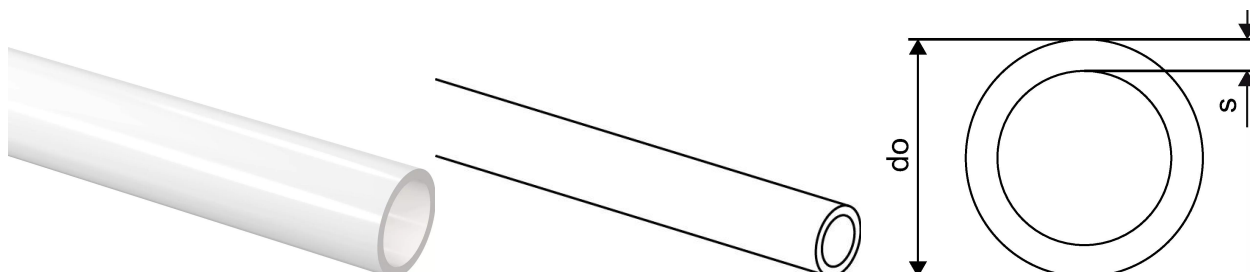

About Uponor Combi Pipe white opaque PN6

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 2 - hot water supply
- Application class 4 - Underfloor heating and low temperature radiators
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 90°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Combi Pipe white opaque PN6 16x1,8 200m

1059183

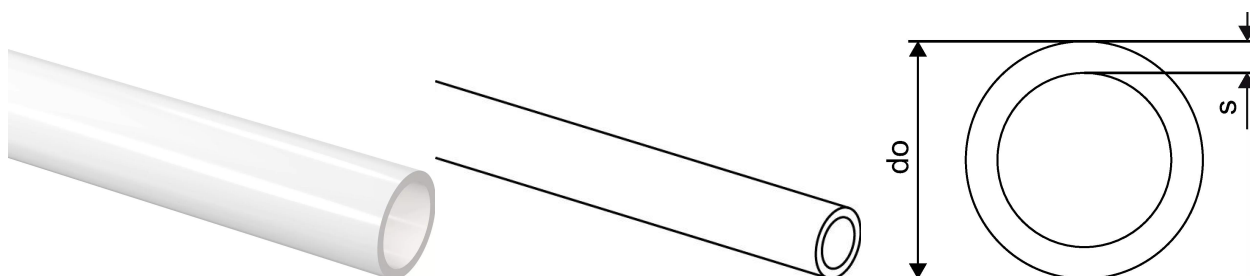

Technical data

Item no EAN	6414905514410
Item no GTIN	06414905514410
Item (unit of measurement)	m
Packaging Quantity 1	200
Packaging Quantity 4	1200
Item Replacement 1	1059182
Packaging GTIN PL1	06414905463466
Packaging GTIN PL4	06414905495641
Item Unit Length	1000
Item Unit Height	16
Item Unit Weight	0,14
Item Unit Width	16

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb