


Uponor S-Press PLUS radi tee adapter plated 16-15CU-16 l=350mm**1070681**

- With cranked copper pipe 15 x 1 mm, plated
- The connection of the plated copper pipe 15 x 1 mm to the radiator can be made with the Uponor clamp compression adapter Cu (Item-No. 1013830).

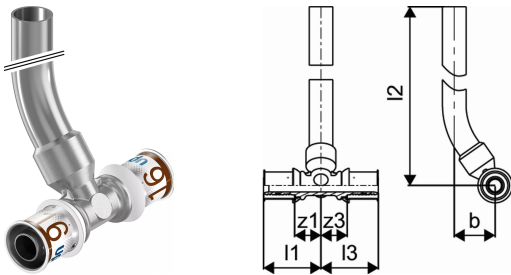

About Uponor S-Press PLUS radi tee adapter plated

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm


-2101339 : Manifolds and adapters

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS radi tee adapter plated 16-15CU-16 l=350mm

1070681

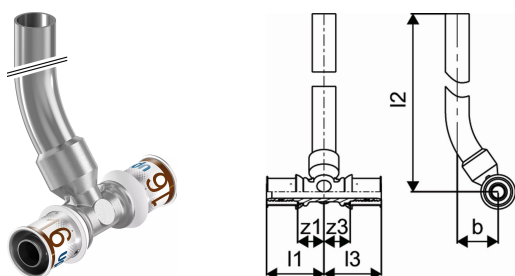

Technical data

Item no EAN	6414905219971
Item no GTIN	06414905219971
Item no VVS	404730116
RSK no.	1808038
Item (unit of measurement)	pce
Length (l1)	38 mm
Length (l2)	351 mm
Length (l3)	38 mm
Z-measurement b	26 mm
z3	18 mm
Packaging Quantity 1	20
Packaging Quantity 4	600
Packaging Material short PL1	PAP
Packaging Material PL1	Corrugated fibreboard
Packaging GTIN PL1	06414905291533
Packaging GTIN PL4	06414905291540
Item Unit Length	362
Item Unit Height	44
Item Unit Weight	0,208
Item Unit Width	73

Technical documents

Download documents here

UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb