


Uponor Ecoflex coupling PN6 125x11,4-R4

1078368

- Connection of PE-Xa or PE pipe
- 6 bar, SDR 11
- Conical thread R", hemp sealing
- Cannot be used with Wipex fittings!
- DR = dezincification resistance brass

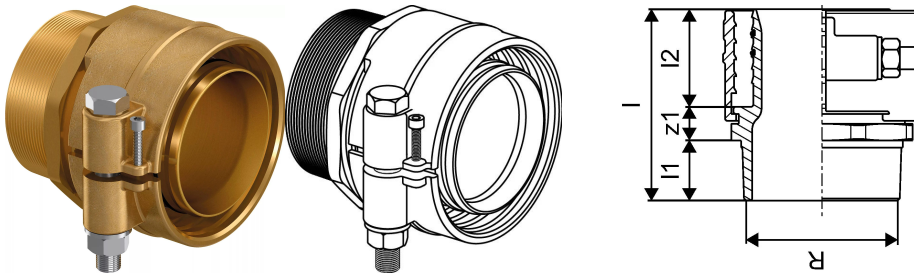

About Uponor Ecoflex coupling PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex coupling PN6 125x11,4-R4

1078368

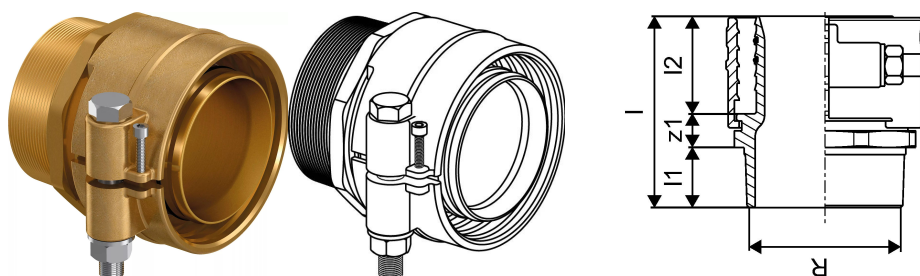

Technical data

Item no EAN	4021598130272
Item no GTIN	04021598130272
Item no VVS	087883425
RSK no.	2282488
Item no NRF	8361341
Item no LVI	1938513
Item (unit of measurement)	pce
Length (l)	137 mm
Length (l1)	43 mm
Length (l2)	70 mm
Packaging Quantity 1	1
Packaging GTIN PL1	06414900328258
Item Unit Length	140
Item Unit Height	140
Item Unit Weight	4,99
Item Unit Width	160

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb