



Uponor Ecoflex chamber 2x250-6x140/175/200

1084576

- Chamber for connecting the casing pipe
- PE body with insulation and reducer spigots
- T and X models available
- Traffic load of 500 kg, higher load with special concret construction possible

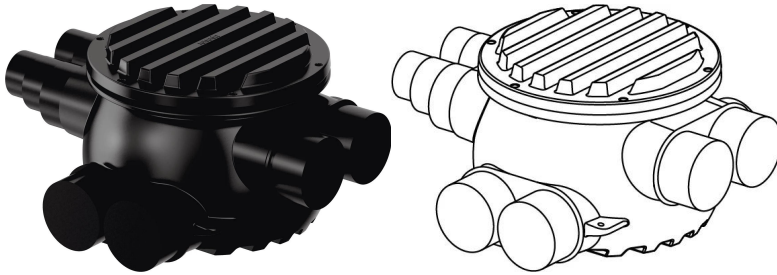

About Uponor Ecoflex chamber

Specification

- All accessories are corrosion resistant.

Application



- Ecoflex accessories are designed to complete the assortment in buried installation.

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex chamber 2x250-6x140/175/200

1084576

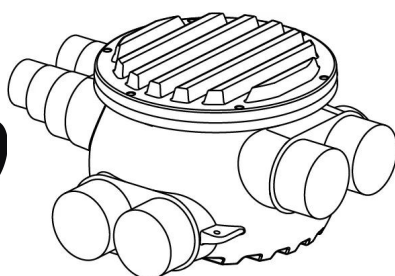

Technical data

| | |
|----------------------------|----------------|
| Item no EAN | 4021598132399 |
| Item no GTIN | 04021598132399 |
| Item no VVS | 087918010 |
| RSK no. | 2282470 |
| Item no NRF | 8361321 |
| Item no LVI | 3010429 |
| Item (unit of measurement) | pce |
| Length (l) | 1652 mm |
| Length (l1) | 1486 mm |
| Z-measurement b | 300 mm |
| Z-measurement h | 725 mm |
| Z-measurement h1 | 420 mm |
| Z-measurement h2 | 165 mm |
| Packaging Quantity 4 | 1 |
| Packaging GTIN PL4 | 06414905500932 |
| Item Unit Length | 1451 |
| Item Unit Height | 725 |
| Item Unit Weight | 53 |
| Item Unit Width | 1632 |

Technical documents

Download documents here

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb