


Uponor Ecoflex chamber 4x250-4x140/175/200

1084577

- Chamber for connecting the casing pipe
- PE body with insulation and reducer spigots
- T and X models available
- Traffic load of 500 kg, higher load with special concret construction possible

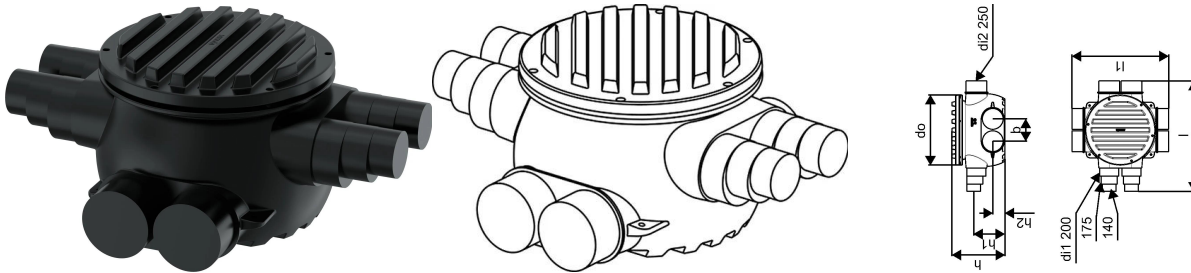

About Uponor Ecoflex chamber

Specification

- All accessories are corrosion resistant.

Application


- Ecoflex accessories are designed to complete the assortment in buried installation.

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex chamber 4x250-4x140/175/200

1084577

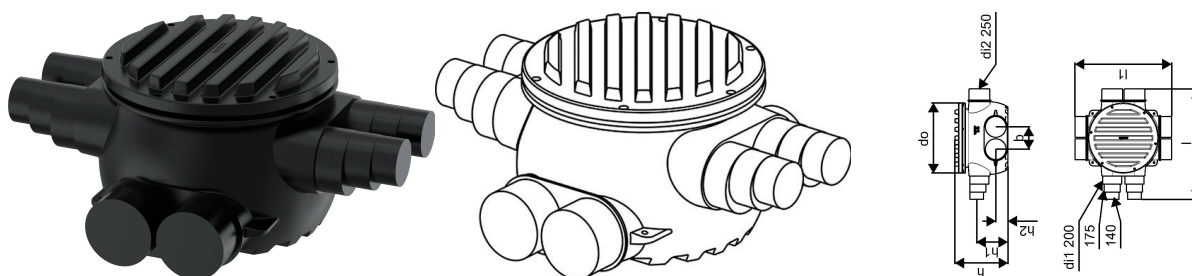

Technical data

Item no EAN	4021598132405
Item no GTIN	04021598132405
Item no VVS	087918011
RSK no.	2282471
Item no NRF	8361322
Item no LVI	3010430
Item (unit of measurement)	pce
Length (l)	1652 mm
Length (l1)	1304 mm
Z-measurement b	300 mm
Z-measurement h	725 mm
Z-measurement h1	420 mm
Z-measurement h2	165 mm
Packaging Quantity 4	1
Packaging GTIN PL4	06414905500949
Item Unit Length	1250
Item Unit Height	725
Item Unit Weight	53
Item Unit Width	1632

Technical documents

Download documents here

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb