


## Uponor Vario S manifold FM 10x3/4 Euro

**1086546**

- Supply with flow meter for balancing and shutoff
- Return with valves and caps

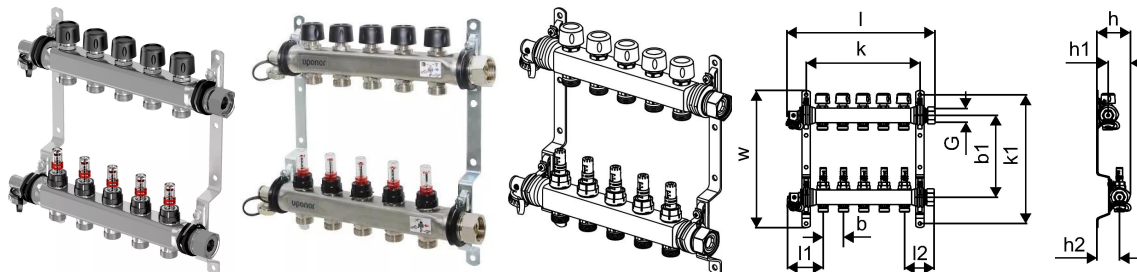

### About Uponor Vario S manifold FM

#### Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold FM 10x3/4 Euro

1086546

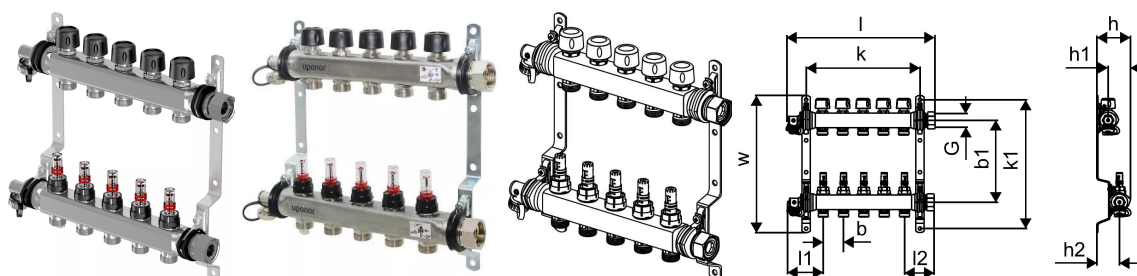

### Technical data

Item no EAN	4021598135277
Item no GTIN	04021598135277
Item no LVI	2022130
Item (unit of measurement)	pce
Length (l)	610 mm
Length (l1)	87 mm
Length (l2)	73 mm
Z-measurement b	50 mm
Z-measurement b1	215 mm
Z-measurement h	75 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	535 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity 1	1
Packaging Quantity 4	48
Packaging GTIN PL1	06414905471959
Packaging GTIN PL4	06414905503278
Item Unit Length	765
Item Unit Height	85
Item Unit Weight	6
Item Unit Width	235

### Technical documents

Download documents here

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)