


Uponor Smart UFH-pipe 20x2,0 240m

1086577

- UFH pipe made of PE-RT
- complying with ISO 22391 and fulfils the requirement for oxygen diffusion resistance as per DIN 4726
- compatible to Uponor Smart compression fittings
- application class 4
- design pressure 6 Bar at 70°C

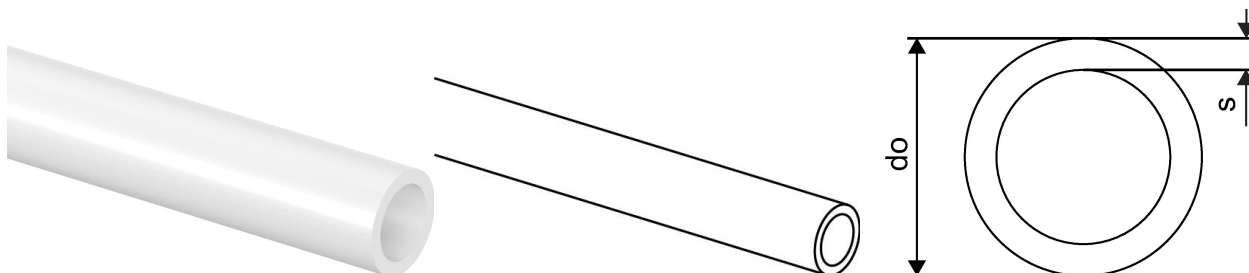


About Uponor Smart UFH-pipe

Specification

- Smart underfloor heating system portfolio
- with Tacker panels and pipe fixations

Uponor Smart UFH-pipe 20x2,0 240m

1086577

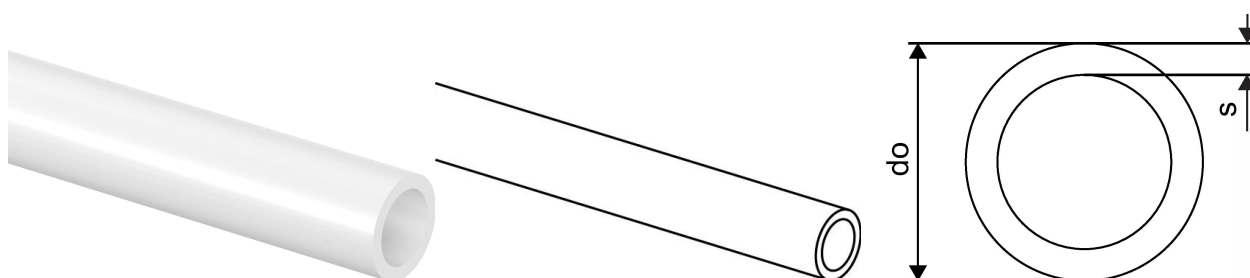

Technical data

Item no EAN	7321500058098
Item no GTIN	07321500058098
Item no VVS	087414220
RSK no.	2716765
Item no LVI	2022057
Item (unit of measurement)	m
Packaging Quantity 3	240
Packaging Quantity 4	960
Packaging GTIN PL3	06414905284115
Packaging GTIN PL4	06414905284139
Item Unit Length	1000
Item Unit Height	20
Item Unit Weight	0,118
Item Unit Width	20

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb