


Uponor Smart UFH-pipe 20x2,0 480m

1086578

- UFH pipe made of PE-RT
- complying with ISO 22391 and fulfils the requirement for oxygen diffusion resistance as per DIN 4726
- compatible to Uponor Smart compression fittings
- application class 4
- design pressure 6 Bar at 70°C

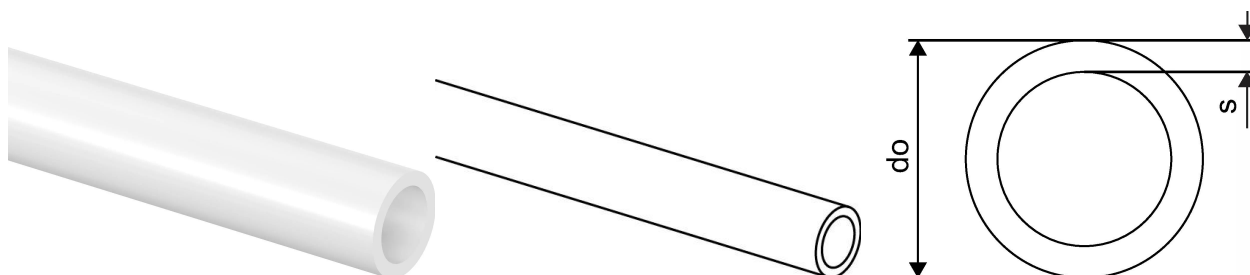


About Uponor Smart UFH-pipe

Specification

- Smart underfloor heating system portfolio
- with Tacker panels and pipe fixations

Uponor Smart UFH-pipe 20x2,0 480m

1086578

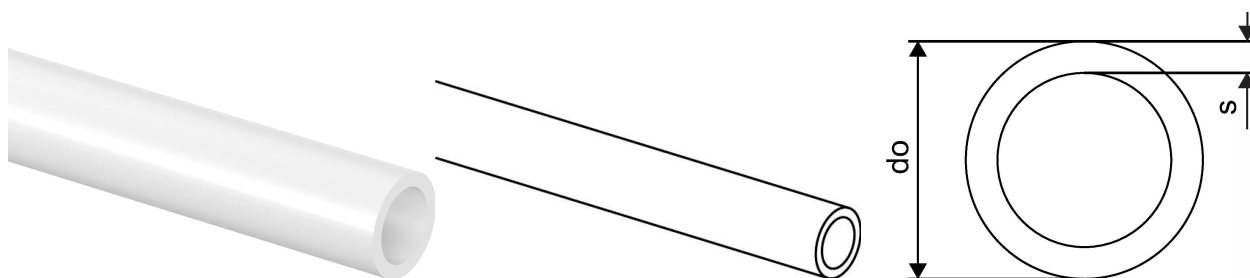

Technical data

Item no EAN	7321500058906
Item no GTIN	07321500058906
Item no VVS	087414620
RSK no.	2716766
Item no LVI	2022058
Item (unit of measurement)	m
Packaging Quantity 3	480
Packaging Quantity 4	960
Packaging GTIN PL3	06414905284146
Packaging GTIN PL4	06414905284153
Item Unit Length	1000
Item Unit Height	20
Item Unit Weight	0,112
Item Unit Width	20

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb