

Uponor Smatrix Base thermostat style T-149 Bus D+ RH

1087813


- measures and displays the perceived room temperature and relative humidity
- protection class: IP30
- color: white RAL9016

Functions:

- heating or cooling demand indication
- RH measured value
- comfort / ECO indication
- ECO setback modification
- manual H/C switchover function
- cooling allowed function (room by room)
- displays celsius or fahrenheit
- operating modes: room temperature (RT), internal with floor max/min (RFT), remote sensor (RS), remote outdoor (RO)
- temperature calibration
- optional: floor sensor can be connected

Consisting of:

- Uponor Smatrix Base thermostat D+RH Style T-149 Bus
- mounting material

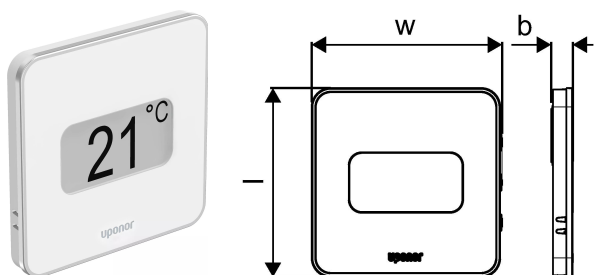

About Uponor Smatrix Base thermostat style T-149 Bus D+ RH

Specification

- up to 4 controller in one system
- operating voltage: 230V
- autobalancing optimises energy use and comfort
- electric control
- supports up to 6 room thermostats and 8 actuators (24V) per controller
- pump and boiler relays
- valve and pump exercise
- relative humidity control
- different wiring options (daisy chain / star)
- 4-wire Bus installation
- communication protocol: RS485 serial bus
- max. power input per actuator: 24VAC / 0.2A (0.4A peak)

Smatrix Base Pulse:

- local access (Wi-Fi) or remote access (internet connection required) via Uponor Smatrix Pulse App (with R-208)
- temporary wi-fi access point for direct access (if local wi-fi is not available) (with R-208)
- smart home ecosystem integration (Amazon Alexa, Google Home) (with R-208)
- multi-home control (with R-208)
- third-party access for remote support (user allowance required) (with R-208)
- history trend analysis via Uponor Smatrix Pulse app (with R-208)
- timer programming (with R-208)
- comfort settings (with R-208)
- supply diagnostics (with R-208)

Application


- wired room temperature control for radiant heating and cooling
- set point range: +5°C ... +35°C

Certification

- CE / EAC

Uponor Smatrix Base thermostat style T-149 Bus D+ RH

1087813

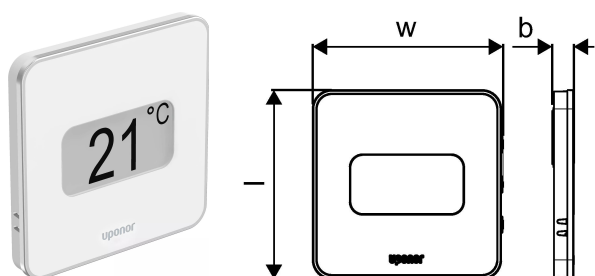

Technical data

Item no EAN	4021598149809
Item no GTIN	04021598149809
Item no VVS	466253060
RSK no.	2987813
Item no NRF	8361247
Item no LVI	2025243
Item (unit of measurement)	pce
Length (l)	80 mm
Z-measurement h	10 mm
Z-measurement w	80 mm
Packaging Quantity 1	1
Packaging Quantity 3	180
Packaging Quantity 4	4320
Packaging GTIN PL1	06414905285457
Packaging GTIN PL3	06414905630196
Packaging GTIN PL4	06414905630509
Item Unit Length	80
Item Unit Height	10
Item Unit Weight	0,057
Item Unit Width	80

Technical documents

Download documents here

UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb