


Uponor Vario S manifold LS 5x3/4 Euro

1088048

- Supply with lock shield valves for shutoff
- Return with valves for balancing and caps

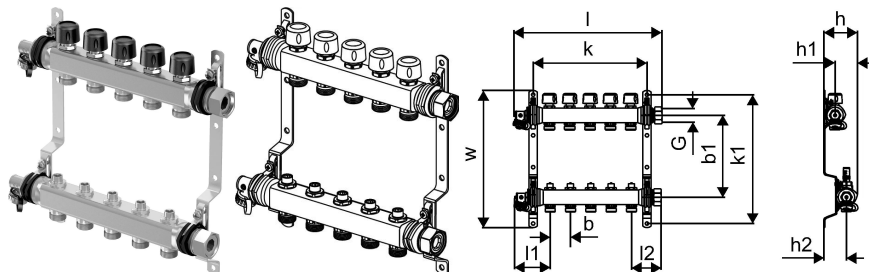

About Uponor Vario S manifold LS

Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S manifold LS 5x3/4 Euro

1088048

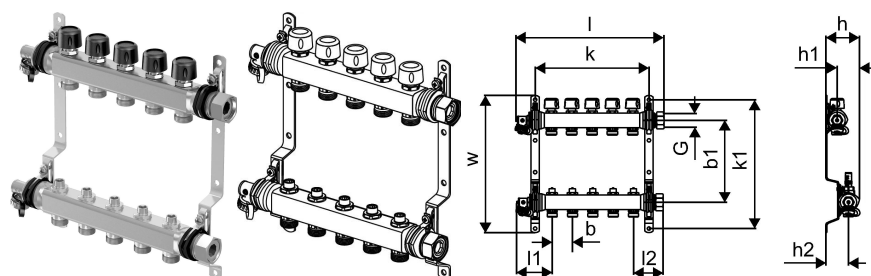

Technical data

Item no EAN	6414905236107
Item no GTIN	06414905236107
Item no VVS	046230005
Item no LVI	2022168
Item (unit of measurement)	pce
Length (l)	360 mm
Length (l1)	87 mm
Length (l2)	73 mm
Z-measurement b	50 mm
Z-measurement b1	215 mm
Z-measurement h	75 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	285 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity 1	1
Packaging Quantity 4	108
Packaging GTIN PL1	06414905475483
Packaging GTIN PL4	06414905475490
Item Unit Length	365
Item Unit Height	85
Item Unit Weight	3,7
Item Unit Width	235

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb