


## Uponor Vario S manifold FM 13x3/4 Euro

**1088864**

- Supply with flow meter for balancing and shutoff
- Return with valves and caps

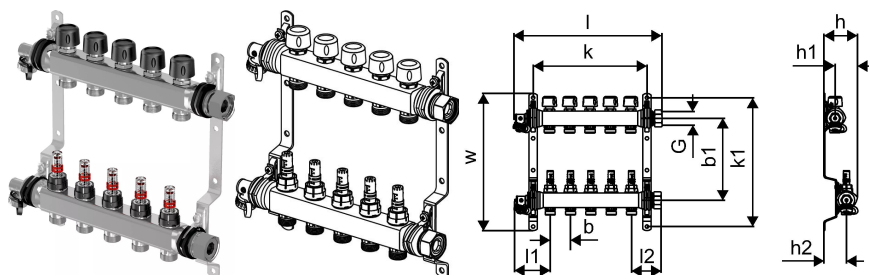

### About Uponor Vario S manifold FM

#### Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold FM 13x3/4 Euro

1088864

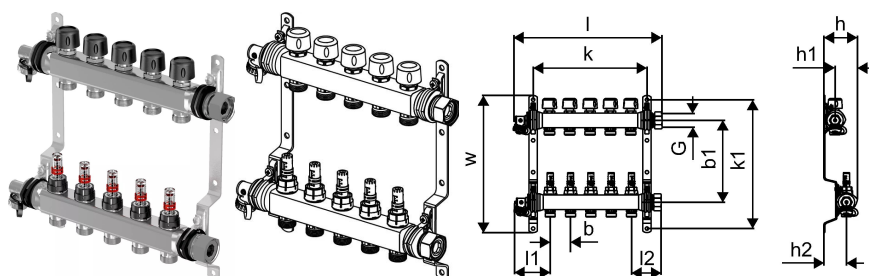

### Technical data

Item no EAN	6414905243020
Item no GTIN	06414905243020
Item (unit of measurement)	pce
Length (l)	760 mm
Length (l1)	87 mm
Length (l2)	73 mm
Z-measurement b	50 mm
Z-measurement b1	215 mm
Z-measurement h	75 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	780 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity 1	1
Packaging Quantity 4	48
Packaging GTIN PL1	06414905475308
Packaging GTIN PL4	06414905475315
Item Unit Length	760
Item Unit Height	230
Item Unit Weight	7,4
Item Unit Width	75

### Technical documents

Download documents here

[E\\_enquiries.uk@uponor.com](mailto:E_enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)