


Uponor Vario S manifold LS 14x3/4 Euro

1088869

- Supply with lock shield valves for shutoff
- Return with valves for balancing and caps

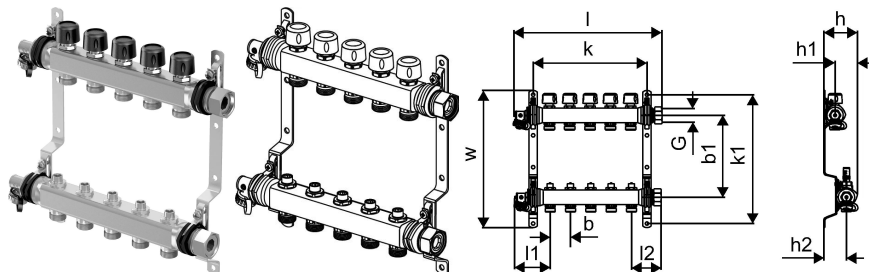

About Uponor Vario S manifold LS

Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S manifold LS 14x3/4 Euro

1088869

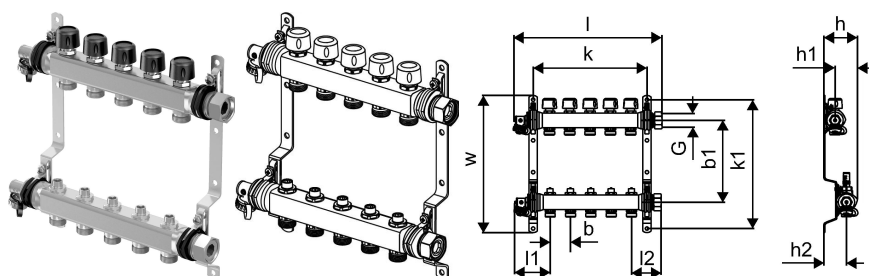

Technical data

Item no EAN	6414905243075
Item no GTIN	06414905243075
Item no VVS	046230014
Item no LVI	2022177
Item (unit of measurement)	pce
Length (l)	810 mm
Length (l1)	87 mm
Length (l2)	73 mm
Z-measurement b	50 mm
Z-measurement b1	215 mm
Z-measurement h	75 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	735 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity 1	1
Packaging Quantity 4	36
Packaging GTIN PL1	06414905475469
Packaging GTIN PL4	06414905475476
Item Unit Length	915
Item Unit Height	85
Item Unit Weight	7,9
Item Unit Width	235

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb