


## Uponor Vario S manifold LS 15x3/4 Euro

**1088870**

- Supply with lock shield valves for shutoff
- Return with valves for balancing and caps

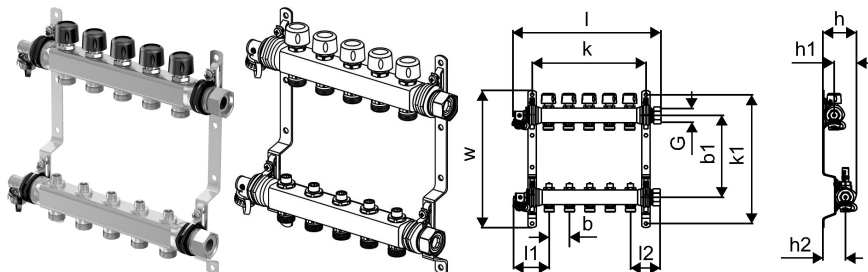

### About Uponor Vario S manifold LS

#### Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold LS 15x3/4 Euro

1088870

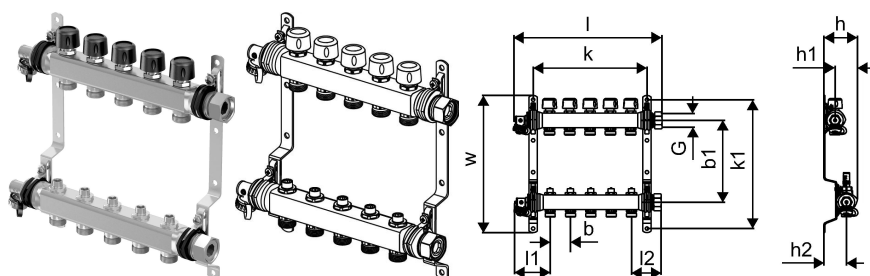

### Technical data

Item no EAN	6414905243082
Item no GTIN	06414905243082
Item no VVS	046230015
Item no LVI	2022178
Item (unit of measurement)	pce
Length (l)	860 mm
Length (l1)	87 mm
Length (l2)	73 mm
Z-measurement b	50 mm
Z-measurement b1	215 mm
Z-measurement h	75 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	785 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity 1	1
Packaging Quantity 4	36
Packaging GTIN PL1	06414905475445
Packaging GTIN PL4	06414905475452
Item Unit Length	915
Item Unit Height	85
Item Unit Weight	8,4
Item Unit Width	235

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)