


Uponor Thermatop M 1350X277mm


1090934

- Emitter made of 16 x 2,0 mm Uni Pipe PLUS with 10 pipe rows and up to 37,3 m per m² module.
- For grid distances of CD-profiles of 333mm
- The pipe is 100% diffusion-resistant according to DIN 4726.
- Cooling capacity according to EN 14240 (8K) up to 67 W/m²
- Heating capacity according to EN 14037 (15K) up to 105 W/m².
- Sound absorption according to DIN EN ISO 354 with α_w between 0,60 to 0,65.
- Capacity and acoustic values depending on gypsum board.

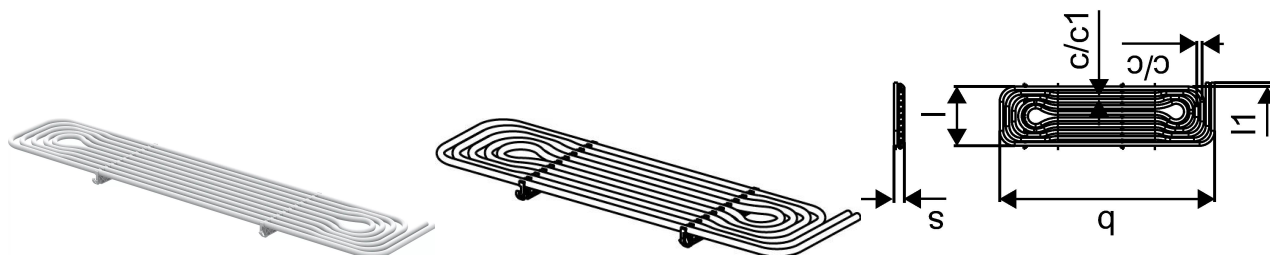

Uponor Thermatop M 1350X277mm

1090934

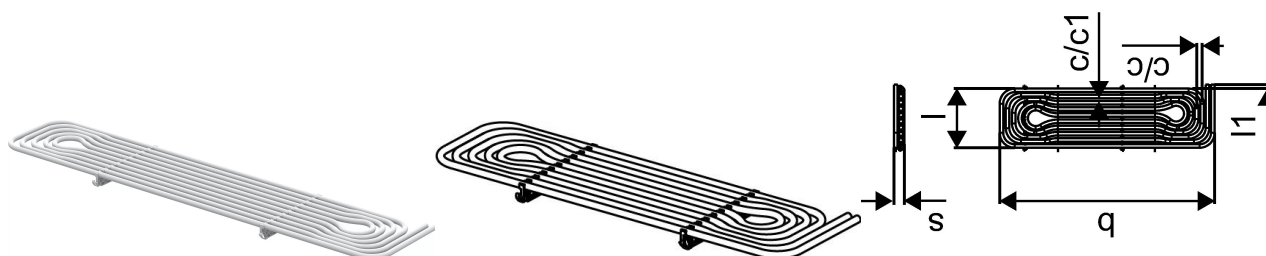

Technical data

Item no EAN	6414905221998
Item no GTIN	06414905221998
Item (unit of measurement)	pce
Distance_center_center	24 mm
Distance_center_center_1	28 mm
Length (l)	277 mm
Length (l1)	17 mm
Z-measurement b	1350 mm
Packaging Quantity 1	10
Packaging Quantity 4	200
Packaging GTIN PL1	06414905269280
Packaging GTIN PL4	06414905277124
Item Unit Length	1350
Item Unit Height	39
Item Unit Weight	1,64
Item Unit Width	277

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb