


## Uponor Thermatop M 1350X277mm


**1090934**

- Emitter made of 16 x 2,0 mm Uni Pipe PLUS with 10 pipe rows and up to 37,3 m per m<sup>2</sup> module.
- For grid distances of CD-profiles of 333mm
- The pipe is 100% diffusion-resistant according to DIN 4726.
- Cooling capacity according to EN 14240 (8K) up to 67 W/m<sup>2</sup>
- Heating capacity according to EN 14037 (15K) up to 105 W/m<sup>2</sup>.
- Sound absorption according to DIN EN ISO 354 with  $\alpha_w$  between 0,60 to 0,65.
- Capacity and acoustic values depending on gypsum board.

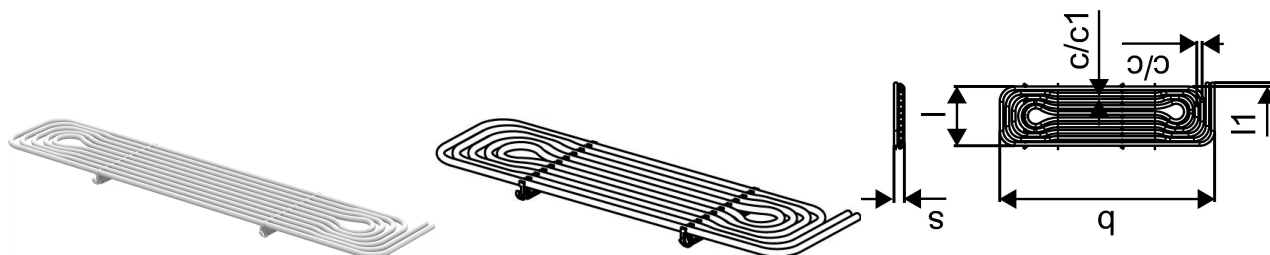

## Uponor Thermatop M 1350X277mm

1090934

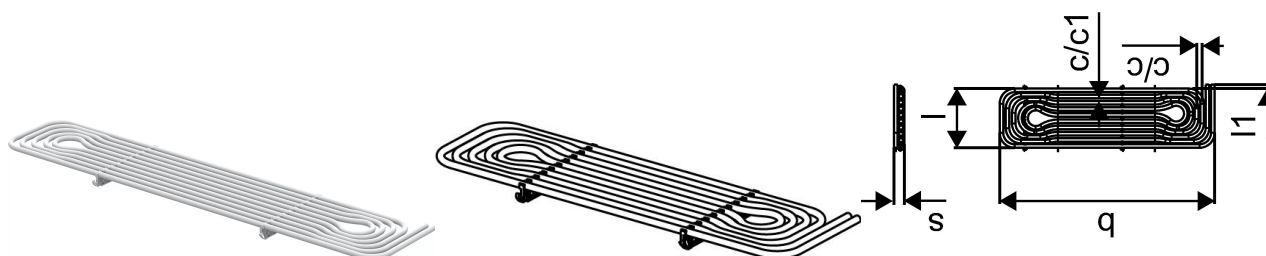

### Technical data

|                            |                |
|----------------------------|----------------|
| Item no EAN                | 6414905221998  |
| Item no GTIN               | 06414905221998 |
| Item (unit of measurement) | pce            |
| Distance_center_center     | 24 mm          |
| Distance_center_center_1   | 28 mm          |
| Length (l)                 | 277 mm         |
| Length (l1)                | 17 mm          |
| Z-measurement b            | 1350 mm        |
| Packaging Quantity 1       | 10             |
| Packaging Quantity 4       | 200            |
| Packaging GTIN PL1         | 06414905269280 |
| Packaging GTIN PL4         | 06414905277124 |
| Item Unit Length           | 1350           |
| Item Unit Height           | 39             |
| Item Unit Weight           | 1,64           |
| Item Unit Width            | 277            |

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)