

## Uponor Combi Port M-Pro HeatInterface RC 19 CB BP DT TL

**1093774**

RC version for domestic hot water and direct heating with radiator connection (no mixing circuit).

Dimensioning codes:

15,19 – domestic hot water capacity indication (l/min)

CB – copper brazed stainless steel heat exchanger for domestic hot water preparation

St – free of non-ferrous metal brazed stainless steel heat exchanger for domestic hot water preparation

BP – supply lines preheating function

DI – primary differential pressure controller at the heat interface unit inlet


DT – differential pressure controller at the heat interface unit heat circuit for domestic hot water preparation

TL – thermostatic temperature limiter for domestic hot water with submersible sensor

RL – return temperature limiter for apartment heating circuit


ZM – circulation module for domestic hot water with safety valve, circulation pump, and differential pressure regulator. A waste water connection is needed.

ZV – zone valve in residential heating circuit return line without actuator

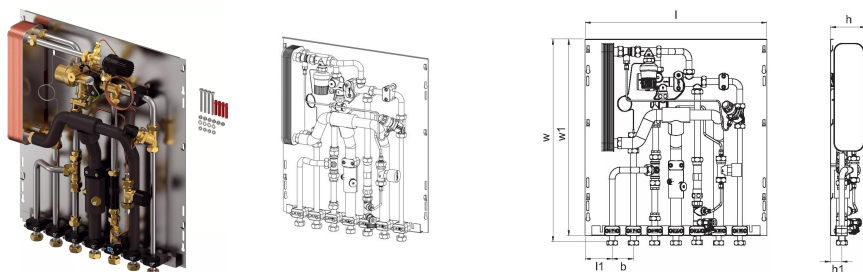

## Uponor Combi Port M-Pro HeatInterface RC 19 CB BP DT TL

1093774

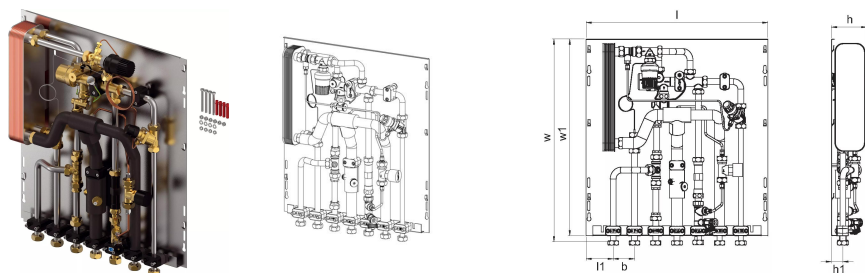

### Technical data

Item no EAN	6414905230914
Item no GTIN	06414905230914
Item (unit of measurement)	pce
Length (l)	556 mm
Length (l1)	83 mm
Z-measurement b	65 mm
Z-measurement h	108 mm
Z-measurement h1	35 mm
Z-measurement w	618 mm
Z-measurement w1	600 mm
Packaging Quantity 1	1
Packaging GTIN PL1	06414905292226
Packaging GTIN PL4	06414905292806
Item Unit Length	600
Item Unit Height	110
Item Unit Weight	13
Item Unit Width	555

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)