

## Uponor Combi Port M-Base HeatInterface RC 15 CB ZV NI

**1093801**

RC version for domestic hot water and direct heating with radiator connection (no mixing circuit). Mixing circuit can be upgraded by using the dedicated cabinet with installed UFH mixing group (Uponor Combi Port M-Base Cabinet+manif IW-UFH). Bypass function can be upgraded by using special accessory - Uponor Combi Port M-Base Heat Bypass.

Dimensioning codes:


15,19 – domestic hot water capacity indication (l/min)

CB – copper brazed stainless steel heat exchanger for domestic hot water preparation

TL – thermostatic temperature limiter for domestic hot water with submersible sensor


ZV – zone valve in residential heating circuit return line without actuator

NI – no pipe insulation and/or insulated cover

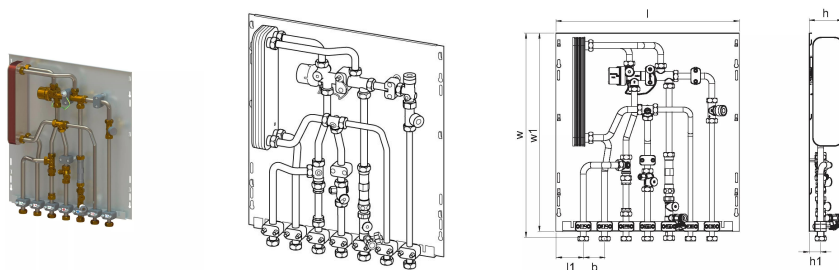

## Uponor Combi Port M-Base HeatInterface RC 15 CB ZV NI

1093801

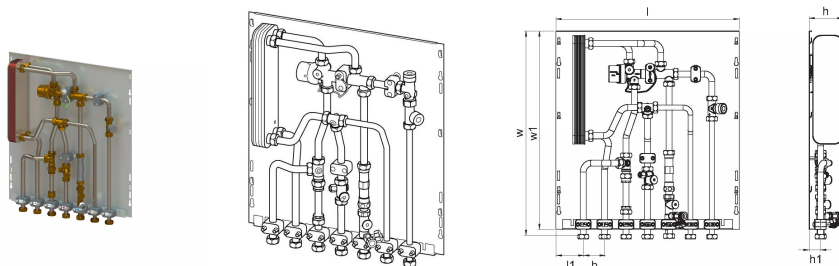

### Technical data

Item no EAN	6414905231317
Item no GTIN	06414905231317
Item (unit of measurement)	pce
Length (l)	556 mm
Length (l1)	83 mm
Z-measurement b	65 mm
Z-measurement h	107 mm
Z-measurement h1	35 mm
Z-measurement w	618 mm
Z-measurement w1	600 mm
Packaging Quantity 1	1
Packaging GTIN PL1	06414905292554
Packaging GTIN PL4	06414905293155
Item Unit Length	600
Item Unit Height	110
Item Unit Weight	12,4
Item Unit Width	555

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)