

Uponor Combi Port M-Base HeatInterface RC 19 CB TL ZV NI

1093806

RC version for domestic hot water and direct heating with radiator connection (no mixing circuit). Mixing circuit can be upgraded by using the dedicated cabinet with installed UFH mixing group (Uponor Combi Port M-Base Cabinet+manif IW-UFH). Bypass function can be upgraded by using special accessory - Uponor Combi Port M-Base Heat Bypass.

Dimensioning codes:


15,19 – domestic hot water capacity indication (l/min)

CB – copper brazed stainless steel heat exchanger for domestic hot water preparation

TL – thermostatic temperature limiter for domestic hot water with submersible sensor


ZV – zone valve in residential heating circuit return line without actuator

NI – no pipe insulation and/or insulated cover

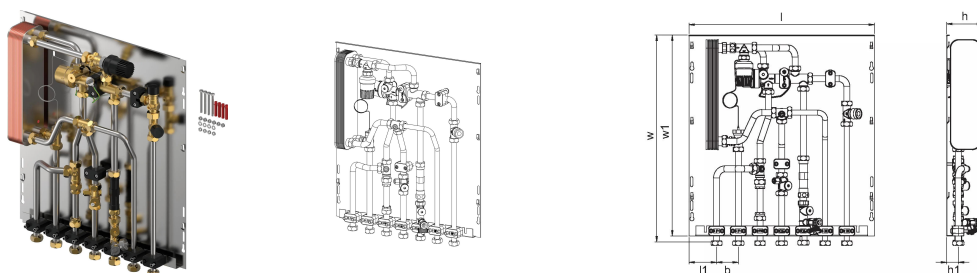

Uponor Combi Port M-Base HeatInterface RC 19 CB TL ZV NI

1093806

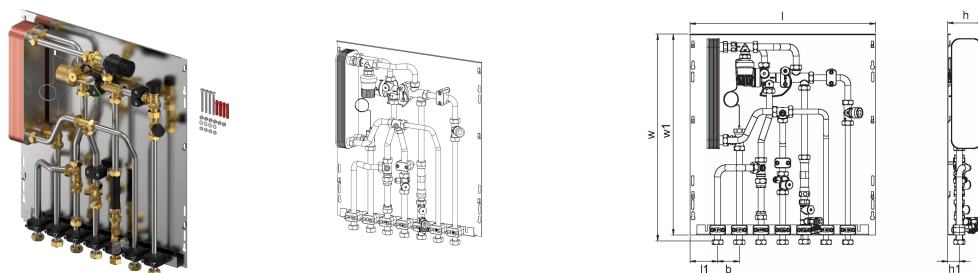

Technical data

Item no EAN	6414905231362
Item no GTIN	06414905231362
Item (unit of measurement)	pce
Length (l)	556 mm
Length (l1)	83 mm
Z-measurement b	65 mm
Z-measurement h	107 mm
Z-measurement h1	35 mm
Z-measurement w	618 mm
Z-measurement w1	600 mm
Packaging Quantity 1	1
Packaging GTIN PL1	06414905292615
Packaging GTIN PL4	06414905293216
Item Unit Length	600
Item Unit Height	110
Item Unit Weight	13,5
Item Unit Width	555

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb