


## Uponor Ecoflex Thermo Twin HP 2x32x2,9-2x32x3,5/140

**1093894**

- A to B or heat pump connection pipe, heating and cooling
- Two medium pipe PE-Xa with oxygen barrier, SDR 11
- Two cable conduits for power and data cables
- Max. load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- PEX foam, HDPE casing

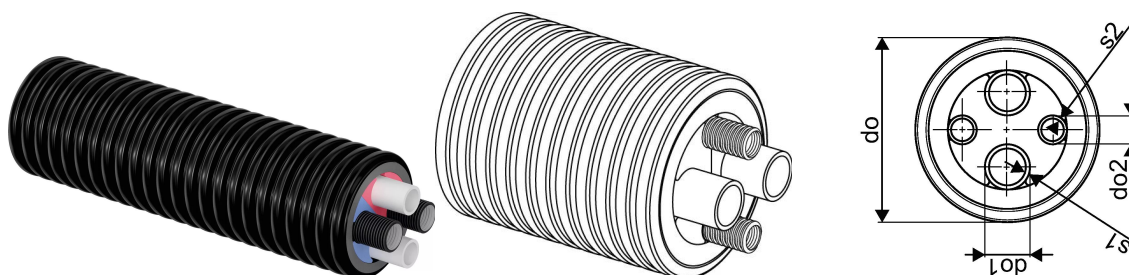

### About Uponor Ecoflex Thermo Twin HP

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) or PN 10 (SDR 7,4), Oxygen tightness based on EN 15632
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex Thermo Twin HP 2x32x2,9-2x32x3,5/140

1093894

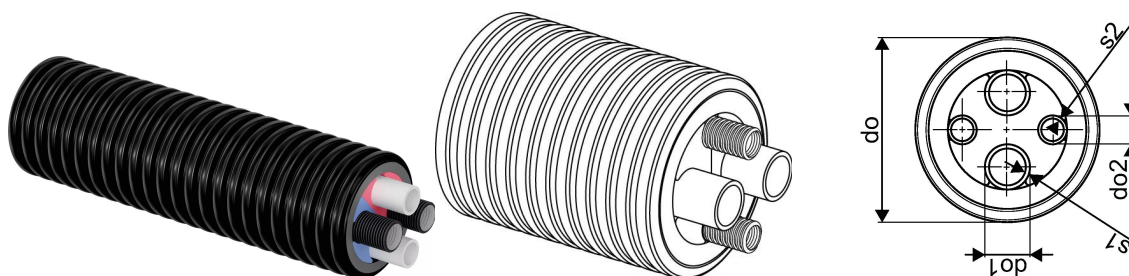

### Technical data

Item no EAN	6414905231607
Item no GTIN	06414905231607
Item no VVS	087808132
RSK no.	2266306
Item no LVI	3010125
Item (unit of measurement)	m
Bending radius 2	0,5 m
Packaging Quantity 1	200
Packaging GTIN PL1	06414905473526
Item Unit Length	1000
Item Unit Height	140
Item Unit Weight	1,655
Item Unit Width	140

### Technical documents

[Download documents here](#)

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)