


Uponor Fluvia T pumpgroup MPG-UK 15kW

1094185

- Integrated pump: Q: 0,1 - 0,4 m³/h, H: 0,2 - 1,1 m, Phyd< 1W
- Bracket for left- or right installation
- Air bleed screw
- Secondary circuit temp. range 20-50°C
- Balancing valve
- Secondary loop 3/4" eurocone
- Primary valves with clampconnection for CU-Pipe 15mm
- For control of UFH in small zones
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C
- Maximal heat load: 15 kW
- kvs flow valve: 3,2 m³/h
- Water temperature and flow rates controlled by thermostatic 4 way valve

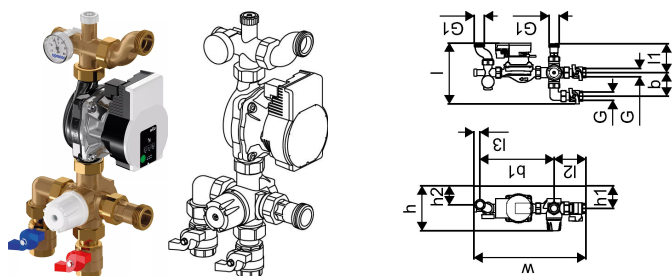

About Uponor Fluvia T pumpgroup MPG-UK

Specification


- Integrated pump: Q: 0,1 - 0,4 m³/h, H: 0,2 - 1,1 m, Phyd< 1W
- Bracket for left- or right installation
- Air bleed screw
- Secondary circuit temp. range 20-50°C
- Balancing valve
- Secondary loop 3/4" eurocone
- Primary valves with clampconnection for CU-Pipe 15mm

Application

- For control of UFH in small zones
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C

Uponor Fluvia T pumpgroup MPG-UK 15kW

1094185

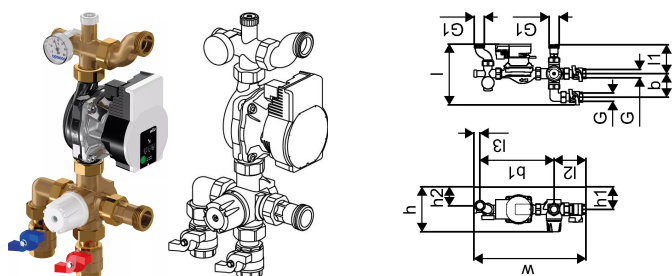

Technical data

Item no EAN	6414905232215
Item no GTIN	06414905232215
Item no VVS	381111366
Item (unit of measurement)	pce
Length (l)	197 mm
Length (l1)	93 mm
Length (l2)	103 mm
Length (l3)	45 mm
Z-measurement b1	76 mm
Z-measurement b2	215 mm
Z-measurement h	129 mm
Z-measurement h1	50 mm
Z-measurement h2	30 mm
Packaging Quantity 1	1
Packaging Quantity 4	70
Packaging GTIN PL1	06414905429219
Packaging GTIN PL4	06414905429226
Item Unit Length	285
Item Unit Height	90
Item Unit Weight	4,4
Item Unit Width	140

Technical documents

[Download documents here](#)

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb