


Uponor Combi Port M-Pro Temp. Limiter 2HC

1094561

Supplied lose return temperature limiter for second heating circuit connections in UFH version (2HC)

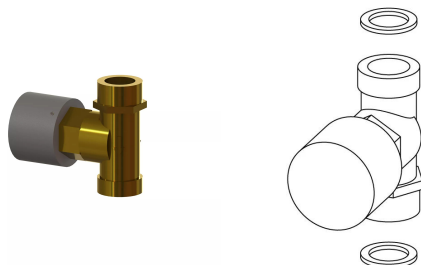

About Uponor Combi Port M-Pro Temp. Limiter 2HC

Specification

- port completely assembled and pressure tested
- technical limits of use in water for heating and plumbing are shown in technical data sheets
- pipe clamps made of plastic for sound protection and thermal decoupling
- DVGW certified PM Valve with patented triple-sealing technology
- thermal insulation at the supply pipes
- thermostatic bypass valve
- cold water outlet
- spacer for heat meter 110 mm x3/4"
- spacer for water meter 110 mm x3/4"
- venting and drainage valve
- strainer for cold water 0,5 mm
- strainer for primary heating supply line 0,5 mm
- Connection possibility (marked) of an electrical earthing lug
- max. operating pressure heating: PN10
- max. operating pressure sanitary: PN10
- max. operating temperature: 85 °C
- max. differential pressure primary heating: 2,5 bar
- min. pressure sanitary: 2,0 bar
- fitting material sanitary: CW617N
- fitting material heating: CW617N, CW614N
- pipe material: stainless steel 1.4401
- measurements: W/H/D 556 x 620 x 110 mm

Application


- Decentralized instantaneous domestic hot water generation
- Underfloor heating systems
- Radiator heating systems

Certification

- DVGW approval

Uponor Combi Port M-Pro Temp. Limiter 2HC

1094561

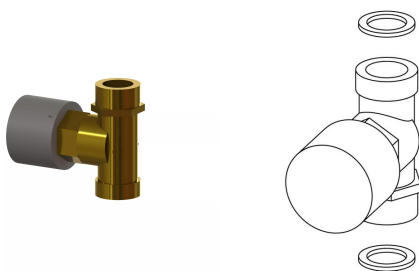

Technical data

Item no EAN	6414905291557
Item no GTIN	06414905291557
Item (unit of measurement)	pce
Packaging Quantity 1	1
Packaging Quantity 4	30
Packaging GTIN PL1	06414905291564
Packaging GTIN PL4	06414905293063
Item Unit Length	200
Item Unit Height	100
Item Unit Weight	1,4
Item Unit Width	150

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb