


Uponor Fluvia T pumpgroup Push-12 TH-G

1095127

- Integrated pump: Q: 0,1 - 0,4 m³/h, H: 0,2 - 1,1 m, Phyd< 1W
- Bracket for left- or right installation
- Air bleed screw
- Secondary circuit temp. range 20-50°C
- Balancing valve
- Secondary loop 3/4" eurocone
- Primary valves with clampconnection for CU-Pipe 15mm
- For control of UFH in small zones
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C
- Pumpgroup with thermostat 12-28°C
- Secondary max. temperature limiter by 50°C
- Room sensor head with capillary sensor

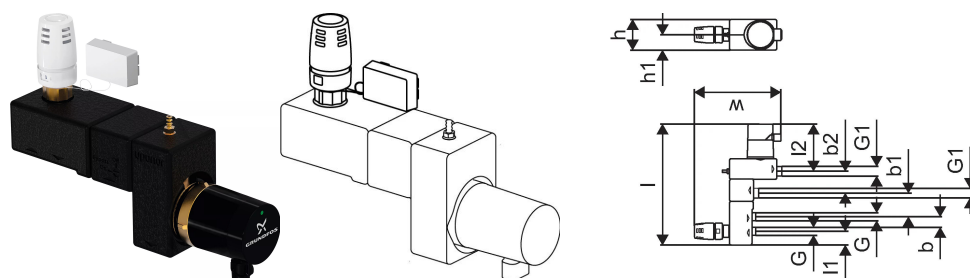

About Uponor Fluvia T pumpgroup Push-12 TH-G

Specification


- Integrated pump: Q: 0,1 - 0,4 m³/h, H: 0,2 - 1,1 m, Phyd< 1W
- Bracket for left- or right installation
- Air bleed screw
- Secondary circuit temp. range 20-50°C
- Balancing valve
- Secondary loop 3/4" eurocone
- Primary valves with clampconnection for CU-Pipe 15mm

Application

- For control of UFH in small zones
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C

Uponor Fluvia T pumpgroup Push-12 TH-G

1095127

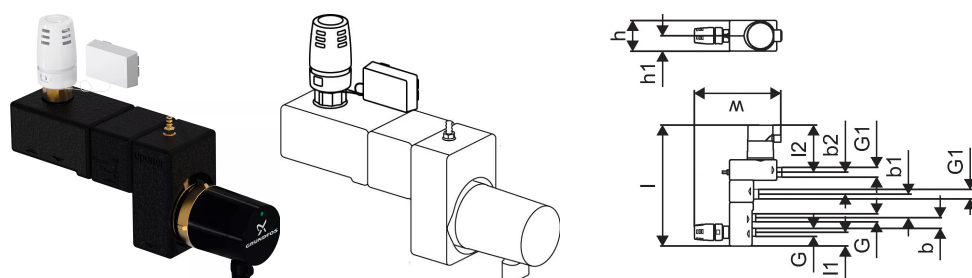

Technical data

Item no EAN	6414905428205
Item no GTIN	06414905428205
Item no VVS	381121043
RSK no.	2988788
Item no NRF	8361162
Item no LVI	2025000
Item (unit of measurement)	pce
Length (l)	332 mm
Length (l1)	38 mm
Length (l2)	129 mm
Z-measurement b	40 mm
Z-measurement b1	65 mm
Z-measurement b2	65 mm
Z-measurement h	84 mm
Z-measurement h1	42 mm
Z-measurement w	240 mm
Packaging Quantity 1	1
Packaging Quantity 4	60
Packaging GTIN PL1	06414905476657
Packaging GTIN PL4	06414905476664
Item Unit Length	332
Item Unit Height	240
Item Unit Weight	2,53
Item Unit Width	84

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb