


Uponor Combi Port M-ProX Heat Bypass top

1095687

Supply lines preheating function with accessory bypass line (supplied lose) for the installation with Combi Port M-ProX Heat Interface unit.

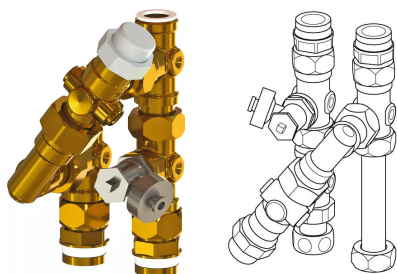

About Uponor Combi Port M-ProX Heat Bypass top

Specification

- port completely assembled and pressure tested
- DVGW certified PM Valve with patented triple-sealing technology
- pipe clamps made of plastic for sound protection and thermal decoupling
- 2 heat exchangers: for heating and domestic hot water
- thermostatic bypass valve
- secondary heating circulation pump with temperature control
- spacer for heat meter 110 mm x3/4"
- spacer for water meter 110 mm x3/4"
- fill and drain valve
- strainer for cold water 0,5 mm
- strainer for primary heating supply line 0,5 mm
- connection possibility (marked) of an electrical earthing lug
- max. operating pressure heating: PN10
- max. operating pressure sanitary: PN10
- max. operating temperature: 85 °C
- min. pressure primary sanitary: 2 bar
- max. differential pressure primary heating: 2,5 bar
- fitting material sanitary: CW617N
- fitting material heating: CW617N, CW614N
- pipe work: stainless steel 1.4401
- including cabinet cover, white powder coated (RAL 9016)

Application


- Decentralized instantaneous domestic hot water generation
- Underfloor heating systems
- Radiator heating systems

Certification

- DVGW approval

Uponor Combi Port M-ProX Heat Bypass top

1095687

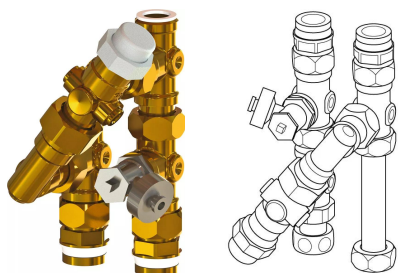

Technical data

Item no EAN	6414905478781
Item no GTIN	06414905478781
Item (unit of measurement)	pce
Packaging Quantity 1	1
Packaging Quantity 4	80
Packaging GTIN PL1	06414905486908
Packaging GTIN PL4	06414905486915
Item Unit Length	220
Item Unit Height	100
Item Unit Weight	1
Item Unit Width	160

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb