


Uponor Ecoflex Supra 110x10,0/200

1095729

- Cold potable water and cooling
- One medium pipe PE 100 RC black, SDR 11
- Max. load 16 bar / 20°C
- PEX foam, HDPE casing

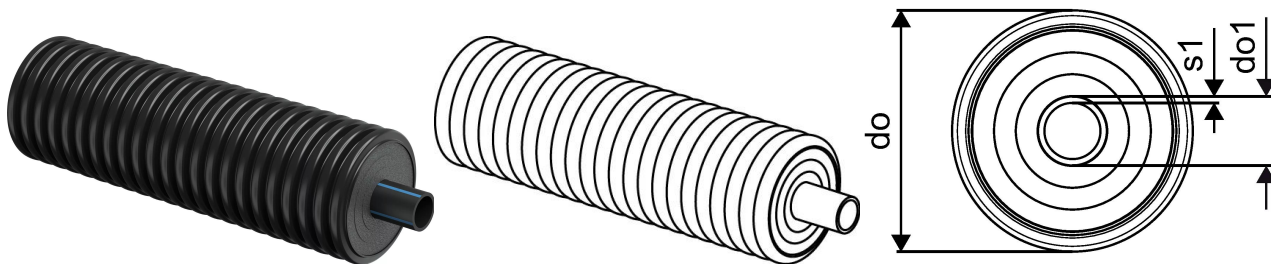

About Uponor Ecoflex Supra

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Medium pipe: Polyethylene PE 100, PN 16 (SDR 11) black with blue layer and new in PE100 RC, PN 16 (SDR 11) black with blue stripes
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of cold potable or cooling water for buried installations.
- Operating temperature +20°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Supra 110x10,0/200

1095729

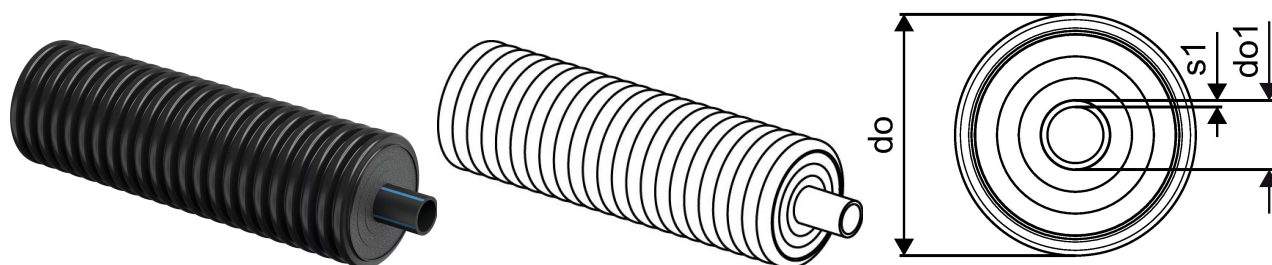

Technical data

Item no EAN	6414905486458
Item no GTIN	06414905486458
Item no NRF	8361431
Item (unit of measurement)	m
Bending radius 2	1,2 m
Packaging Quantity 1	100
Packaging GTIN PL1	06414905537952
Item Unit Length	1000
Item Unit Height	200
Item Unit Weight	5,24
Item Unit Width	200

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb