


Uponor Ecoflex Supra PLUS cable 75x6,8/175 1x10W/m

1095738

- Anti freeze cable for extension

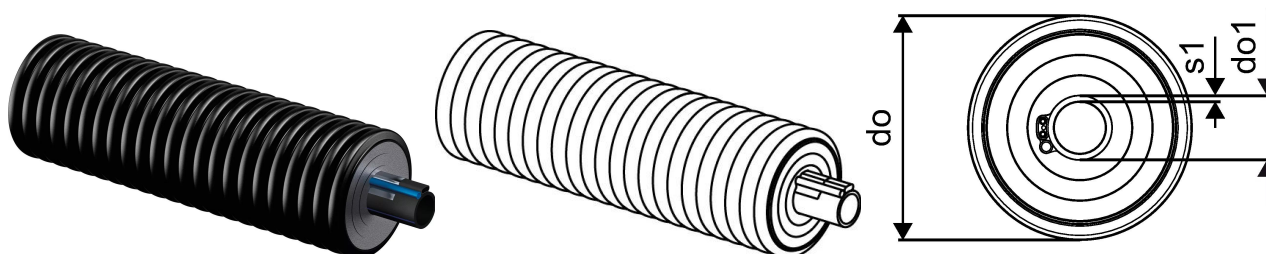

About Uponor Ecoflex Supra PLUS cable

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Medium pipe: Polyethylene PE80, PN 12,5 (SDR 11) or PE100, PN 16 (SDR 11) black with blue stripes or PE 100, PN 16 (SDR 11) black with blue layer and new in PE100 RC, PN16 (SDR11) black with blue stripes
- Cable: self-regulating frost protection cable, nominal power output 10W/m at 5°C, Electricity feed from one supply point max. 150 m
- Conduit pipe: PE tube to insert a sensor and to measure the temperature.
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of cold potable water or pressure drainage in locations where there is a risk of freezing for buried installations.
- Operating temperature +20°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Supra PLUS cable 75x6,8/175 1x10W/m

1095738

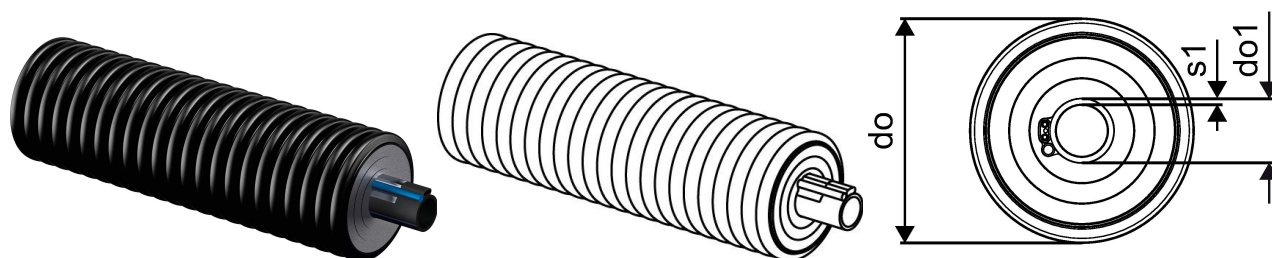

Technical data

Item no EAN	6414905486519
Item no GTIN	06414905486519
Item no VVS	070694475
RSK no.	2407823
Item no NRF	8360935
Item no LVI	1844140
Item (unit of measurement)	m
Bending radius 2	0,9 m
Packaging Quantity 1	150
Packaging GTIN PL1	06414905537563
Item Unit Length	1000
Item Unit Height	175
Item Unit Weight	2,9
Item Unit Width	175

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb