


## Uponor Ecoflex Supra PLUS cable 110x10,0/200 1x10W/m

1095740

- Anti freeze cable for extension

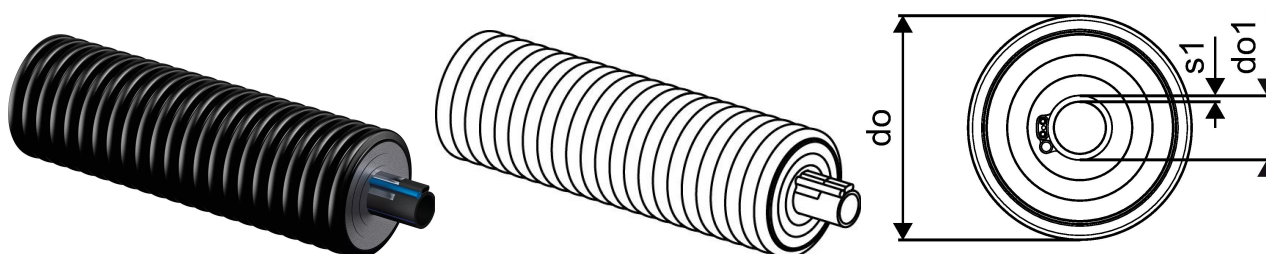

### About Uponor Ecoflex Supra PLUS cable

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Medium pipe: Polyethylene PE80, PN 12,5 (SDR 11) or PE100, PN 16 (SDR 11) black with blue stripes or PE 100, PN 16 (SDR 11) black with blue layer and new in PE100 RC, PN16 (SDR11) black with blue stripes
- Cable: self-regulating frost protection cable, nominal power output 10W/m at 5°C, Electricity feed from one supply point max. 150 m
- Conduit pipe: PE tube to insert a sensor and to measure the temperature.
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of cold potable water or pressure drainage in locations where there is a risk of freezing for buried installations.
- Operating temperature +20°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex Supra PLUS cable 110x10,0/200 1x10W/m

1095740

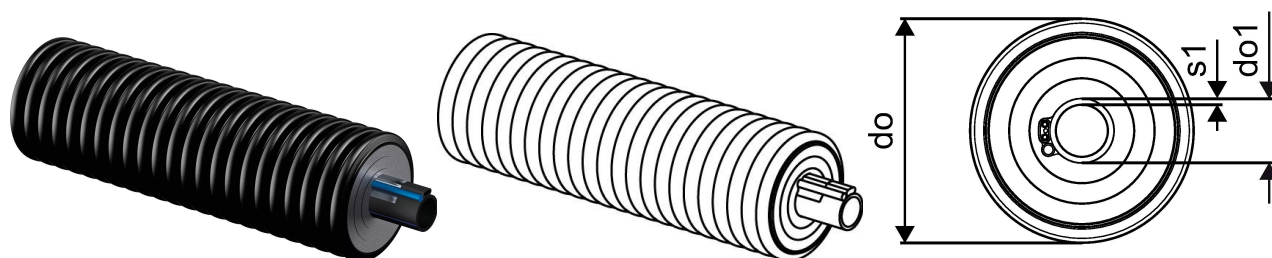

### Technical data

Item no EAN	6414905486533
Item no GTIN	06414905486533
Item no VVS	070694610
RSK no.	2407825
Item no NRF	8360937
Item no LVI	1844142
Item (unit of measurement)	m
Bending radius 2	1,2 m
Packaging Quantity 1	100
Packaging GTIN PL1	06414905537587
Item Unit Length	1000
Item Unit Height	200
Item Unit Weight	5,3
Item Unit Width	200

### Technical documents

[Download documents here](#)

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)